

COMMERCIAL

PRODUCT OFFERING

UPPER SOUTHEAST

NORTH CAROLINA & SOUTH CAROLINA



BELGARD
COMMERCIAL



PAVER FINISHES & APPLICATIONS

Finishes



Standard (smooth)

Unit surfaces and micro-chamfers are carefully molded using a high-quality precision machined steel shoe assembly which creates units with an extremely smooth surface and precision detailed chamfer.



Antiqued

Units are molded to form specific surface and side textures that are processed through tumbling equipment, imparting a distressed or aged appearance.

DuraFusion™

DuraFusion fuses a top layer of rich pigments with Belgard's core color process. The result is a paver with a richness and purity of color that's sleek and vibrant.



Pedestrian

Designated for areas that are primarily for pedestrian applications including commercial plazas that may require occasional access for emergency or maintenance vehicles, as well as residential driveways.



Light Vehicles

Designated for commercial vehicular areas, access ways, and parking lots where only cars and light trucks are anticipated. Heavy vehicles should have limited access and use.



Occasional Heavy Vehicles

Designated for vehicular areas, parking lots, and roadways where limited heavy vehicles are anticipated daily such as large delivery trucks or garbage trucks.




Frequent Heavy Vehicles

Designated for vehicular areas, parking lots, and roadways where heavy vehicles are a regular component of the daily traffic volume.







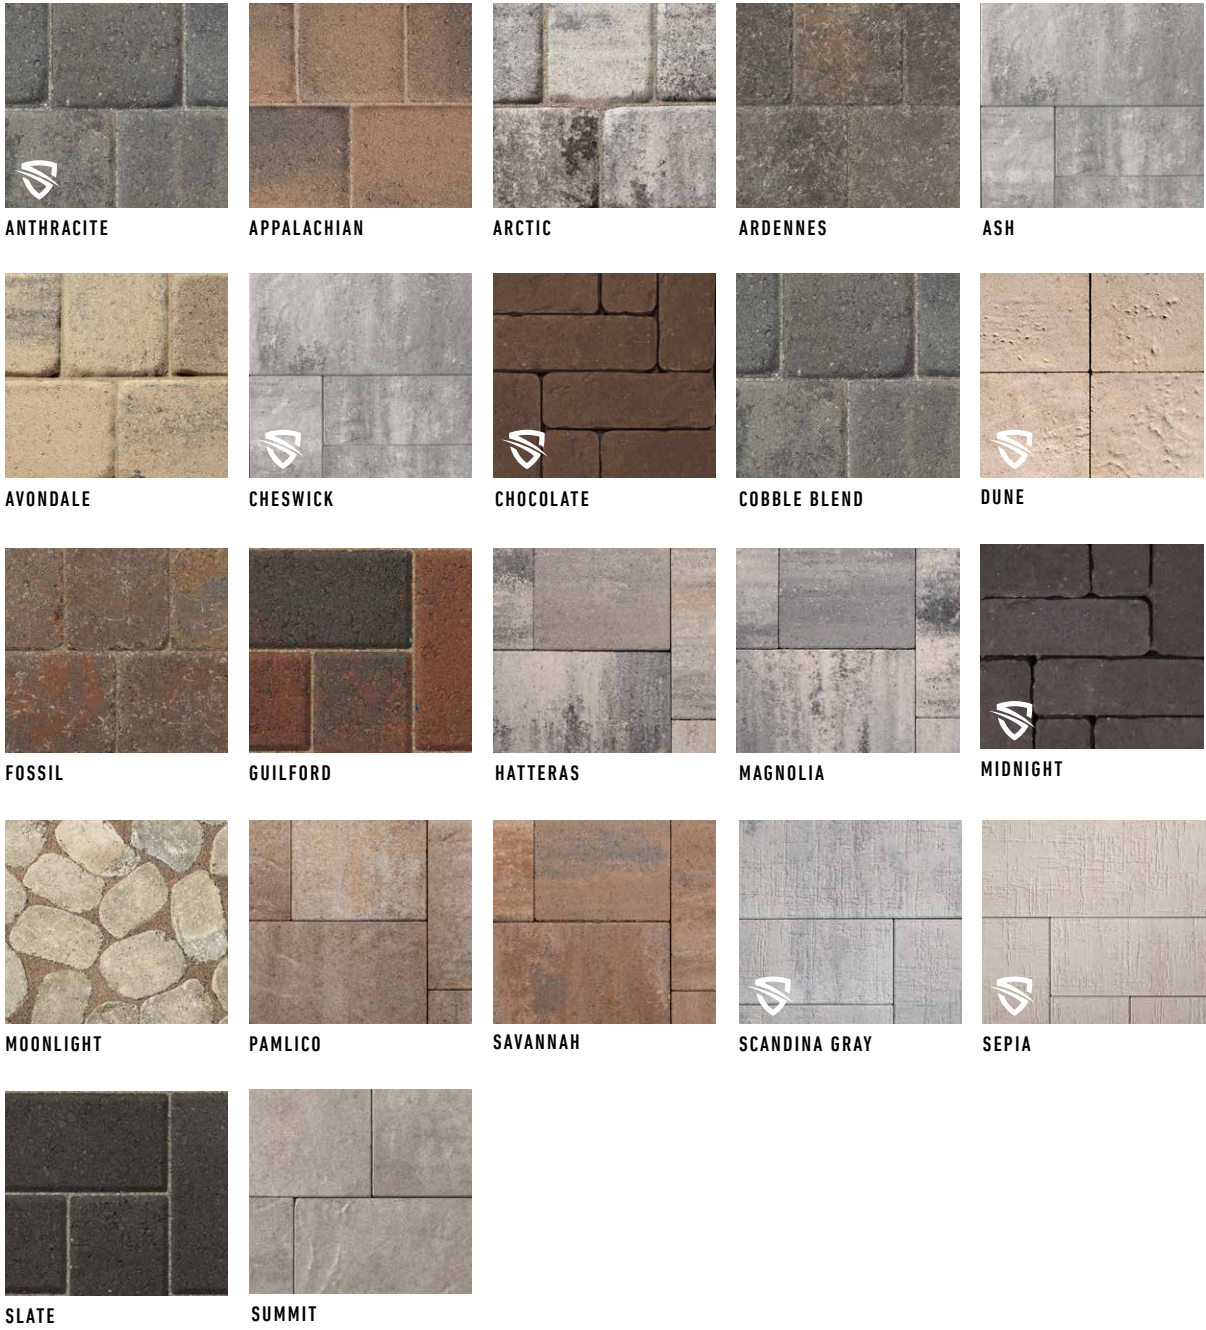















MODULINE 4 X 24

Paver application icons are general recommendations. Site conditions and pavement cross section must be considered. Paver application icons are based on placement over unbound aggregates for setting beds, base and subbase.

PAVER COLORS






DIMENSIONS™ SERIES VEHICULAR & ARCHITECTURAL PAVERS

UNITS	THICKNESS	SIZE	APPLICATIONS				ADA*	MECHANICAL INSTALL	FINISHES		CHAMFER WIDTH	SQ. FT. PER PALLET	PCS. PER PALLET	PALLET WEIGHT (LBS)
									Standard	DuraFusion				
SINGLE PIECE														
 3" x 3"	60 mm	3" x 3"	60 mm				✓		✓		3 mm	96.25	1540	2551
 3" x 9"	60 mm	3" x 9"	60 mm				✓		✓		3 mm	103.13	550	2733
 3" x 12"	60 mm 80 mm	3" x 12"	60 mm	80 mm			✓		✓		3 mm	110 (60 mm) 88 (80 mm)	440 (60 mm) 352 (80 mm)	2,915 (60 mm) 3,168 (80 mm)
 6" x 6"	60 mm 80 mm 101.6 mm	6" x 6"	60 mm	80 mm	80 mm		✓		✓		3 mm	120 (60 mm) 96 (80 mm) 72 (101.6 mm)	480 (60 mm) 384 (80 mm) 288 (101.6 mm)	3,180 (60 mm) 3,456 (80 mm) 3,312 (101.6 mm)
 6" x 9"	60 mm 80 mm	6" x 9"	60 mm	80 mm	80 mm	80 mm	✓		✓	✓	3 mm	112.5 (60 mm) 90 (80 mm)	300 (60 mm) 240 (80 mm)	2,981.25 (60 mm) 3,240 (80 mm)
 6" x 12"	60 mm 80 mm	6" x 12"	60 mm	80 mm			✓		✓		3 mm	120 (60 mm) 96 (80 mm)	240 (60 mm) 192 (80 mm)	3,180 (60 mm) 3,456 (80 mm)
 12" x 12"	60 mm 80 mm 101.6 mm	12" x 12"	60 mm	80 mm	101.6 mm		✓		✓		3 mm	120 (60 mm) 96 (80 mm) 72 (101.6 mm)	120 (60 mm) 96 (80 mm) 72 (101.6 mm)	3,180 (60 mm) 3,456 (80 mm) 3,312 (101.6 mm)
 12" x 18"	60 mm	12" x 18"	60 mm				✓		✓		3 mm	120	80	3,180
 12" x 24"	60 mm	12" x 24"	60 mm				✓		✓		3 mm	120	60	3,180
 18" x 24"	60 mm	18" x 24"	60 mm				✓		✓		3 mm	120	40	3,180
 24" x 24"	60 mm	24" x 24"	60 mm				✓		✓		3 mm	80	20	2,120
 24" x 30"	60 mm	24" x 30"	60 mm				✓		✓		3 mm	100	20	2,650
 24" x 36"	60 mm	24" x 36"	60 mm				✓		✓	✓	3 mm	120	20	3,230
3-PIECE SYSTEM														
 Dimensions 6	60 mm	3" x 6" 6" x 6" 6" x 9"	60 mm				✓		✓		3 mm	120	480	3180
 Dimensions 12	60 mm	12" x 6" 12" x 12" 12" x 18"	60 mm				✓		✓	✓	3 mm	120	120	3180
 Dimensions 18	60 mm	18" x 9" 18" x 18" 18" x 27"	60 mm				✓		✓	✓	3 mm	112.5	50	2981

* May be Suitable for ADA applications. Always evaluate site-specific uses to ensure surface suitability. Product installation and surface maintenance influence compliance with ADA Standards for Accessible Design Section 302 Floors or Ground Surfaces. Tumbling or antiquing pavers can also create surface or edges that may make the product unsuitable for ADA applications.

Interlocking pavers can be used for a variety of different vehicular applications. Appropriate shape and thickness is based on project-specific conditions including type of loading, base design, and subgrade conditions. It is recommended that you consult a Belgard representative in your area before specifying products for vehicular applications.

Secondary processes and finishes including, but not limited to, face-grinding, may impact dimensional tolerances from base dimensions.

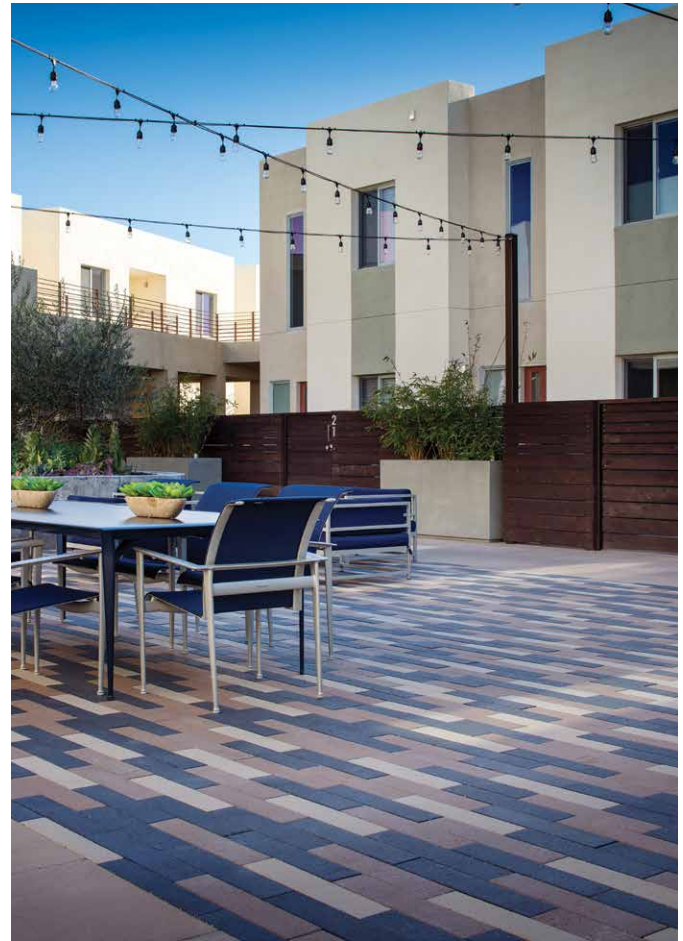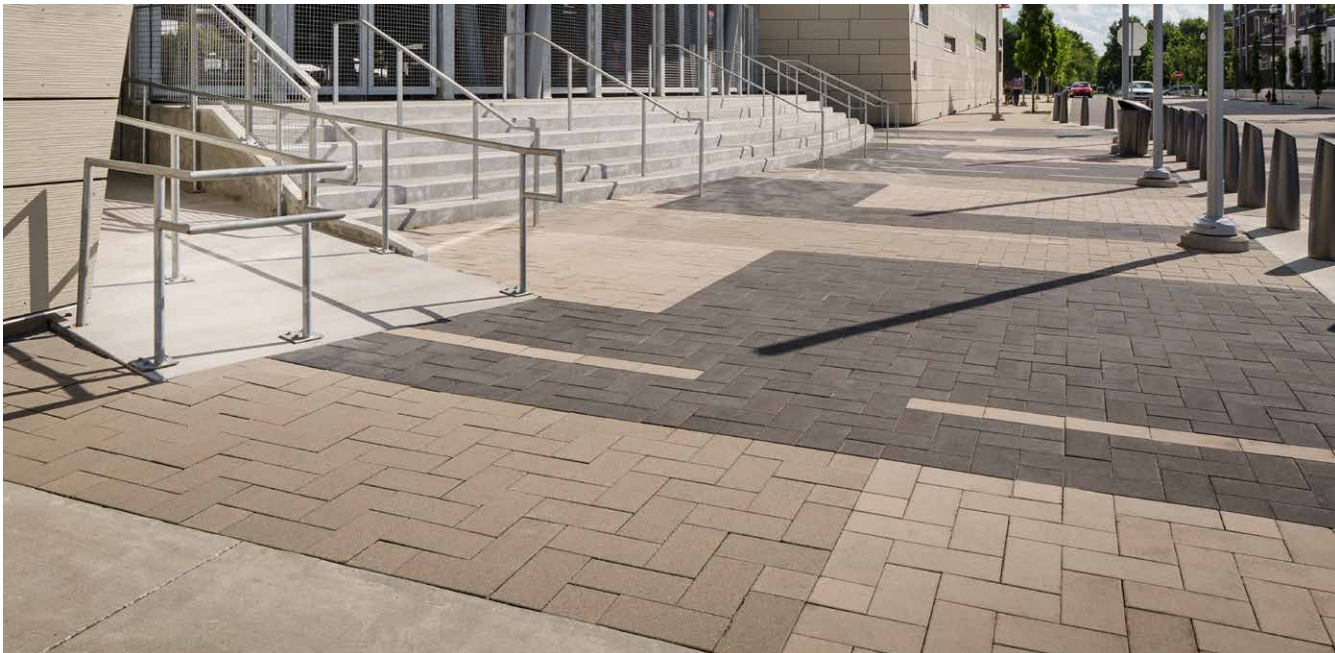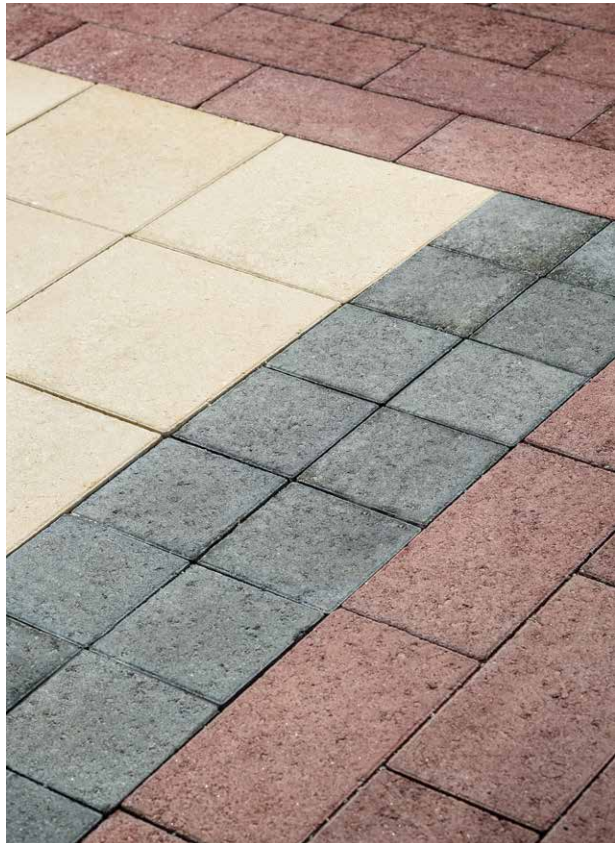

VEHICULAR & ARCHITECTURAL PAVERS











UNITS	THICKNESS	SIZE	APPLICATIONS				ADA*	MECHANICAL INSTALL	FINISHES			CHAMFER WIDTH	SQ. FT. PER PALLET	PCS. PER PALLET	PALLET WEIGHT (LBS)
									Standard	Antiqued	DuraFusion				
 Basalt™	60 mm	12" x 24"	60 mm					✓			✓	3 mm	120	6	3,120
 Belgian Cobble®	60 mm	Various	60 mm							✓		N/A	68	704	1,640
 Brooklyn™	60 mm	3" x 9"	60 mm					✓			✓	N/A	99.5	550	2,784
 Cambridge Cobble® Rectangle	60 mm	6" x 9"	60 mm						✓			rounded	112.5	300	2,970
 Cambridge Cobble® 2-piece	60 mm	6" x 6" 6" x 9"	60 mm						✓			rounded	112.5	336	2,869
 Dublin Cobble® Large Rectangle	60 mm	6" x 9"	60 mm							✓		N/A	112.5	300	2,970
 Dublin Cobble® 3-piece	60 mm	3" x 6" 6" x 6" 6" x 9"	60 mm							✓		N/A	128	528	3,445.20
 Holland Stone	60 mm 80 mm	4" x 8"	60 mm	80 mm	80 mm	80 mm		✓	80 mm	✓		7 mm	120 (60 mm) 96 (80 mm)	540	3,120
 Mega-Arbel® Patio Slab	60 mm	15 ³ / ₈ " x 21"	60 mm							✓		N/A	104.4	72	2,925
 Mega-Bergerac®	80 mm	4 ³ / ₄ " x 9 ¹ / ₆ " 9 ⁷ / ₁₆ " x 9 ⁷ / ₁₆ " 9 ⁷ / ₁₆ " x 14 ³ / ₁₆ "	80 mm							✓		N/A	98	153	3,420
 Mega-Stone™	80 mm	4 ³ / ₄ " x 9 ¹ / ₂ "	80 mm	80 mm	80 mm								98	315	3,347
 Origins™ 6	60 mm	3" x 6" 6" x 6" 6" x 9"	60 mm					✓		✓		3 mm	120	480	3180
 Origins™ 12	60 mm	12" x 6" 12" x 12" 12" x 18"	60 mm					✓		✓		3 mm	120	120	3180
 Origins™ 18	60 mm	18" x 9" 18" x 18" 18" x 27"	60 mm					✓		✓		3 mm	112.5	50	2981
 Origins™ 3 x 3 Accent	60 mm	3" x 3"	60 mm					✓		✓		3 mm	96.25	1540	2551

* May be Suitable for ADA applications. Always evaluate site-specific uses to ensure surface suitability. Product installation and surface maintenance influence compliance with ADA Standards for Accessible Design Section 302 Floors or Ground Surfaces. Tumbling or antiquing pavers can also create surface or edges that may make the product unsuitable for ADA applications.










Interlocking pavers can be used for a variety of different vehicular applications. Appropriate shape and thickness is based on project-specific conditions including type of loading, base design, and subgrade conditions. It is recommended that you consult a Belgard representative in your area before specifying products for vehicular applications.

Secondary processes and finishes including, but not limited to, face-grinding, may impact dimensional tolerances from base dimensions.




VEHICULAR & ARCHITECTURAL PAVERS CONTINUED

UNITS	THICKNESS	SIZE	APPLICATIONS				ADA*	MECHANICAL INSTALL	FINISHES			CHAMFER WIDTH	SQ. FT. PER PALLET	PCS. PER PALLET	PALLET WEIGHT (LBS)	
											Standard					Antiqued
 Origins™ 3 x 9 Accent	60 mm	3" x 9"	60 mm					✓		✓			3 mm	103.13	550	2733
 Origins™ 6 x 6 Accent	60 mm	6" x 6"	60 mm					✓		✓			3 mm	120	480	2733
 Papyrus™ 18	60 mm	18" x 9" 18" x 18" 18" x 27"	60 mm					✓			✓		3 mm	112.5	50	2,981
 Travertino 12	60 mm	6" x 6" 6" x 12" 12" x 12"	60 mm					✓			✓			120	120	3,180

MODULINE SERIES® VEHICULAR & ARCHITECTURAL PAVERS

UNITS	THICKNESS	SIZE	APPLICATIONS				ADA*	MECHANICAL INSTALL	FINISHES		CHAMFER WIDTH	SQ. FT. PER PALLET	PCS. PER PALLET	PALLET WEIGHT (LBS)	
															Standard
MODULINE SERIES® (all sizes made to order)															
 4" x 18"	80 mm	4" x 18"	80 mm					✓		✓		3 mm	72	144	2,592
 4" x 24"	80 mm	4" x 24"	80 mm					✓		✓		3 mm	96	144	3,456
 6" Bishop Hat	60 mm 80 mm 101.6 mm	6"	60 mm	80 mm	80 mm	101.6 mm		✓		✓		3 mm	84.5 (60 mm) 67.6 (80 mm) 50.7 (101.6 mm)	280 (60 mm) 224 (80 mm) 168 (101.6 mm)	2,239.25 (60 mm) 2,433.6 (80 mm) 2,332.2 (101.6 mm)




SPECIALTY PRODUCTS

PRODUCT	SIZE	PALLET INFORMATION
 Eastwood Coping	4" x 9" x 2¾"	168 units per pallet
 Landings™ Step Unit	6" x 48" x 18"	2 units per pallet
 Melville™ Curb	4" x 24" x 6½"	48 units per pallet








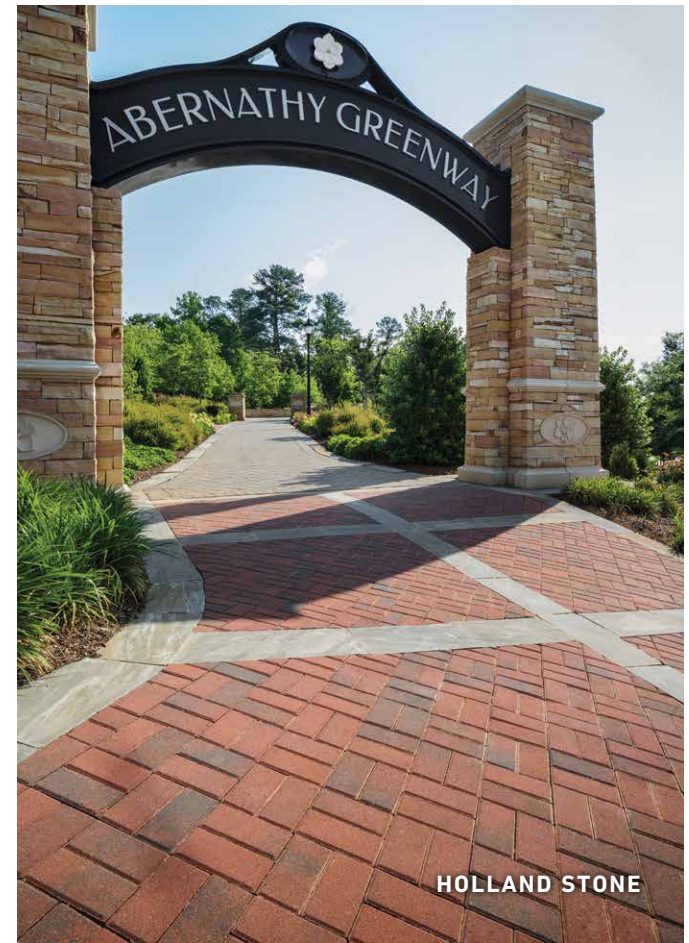
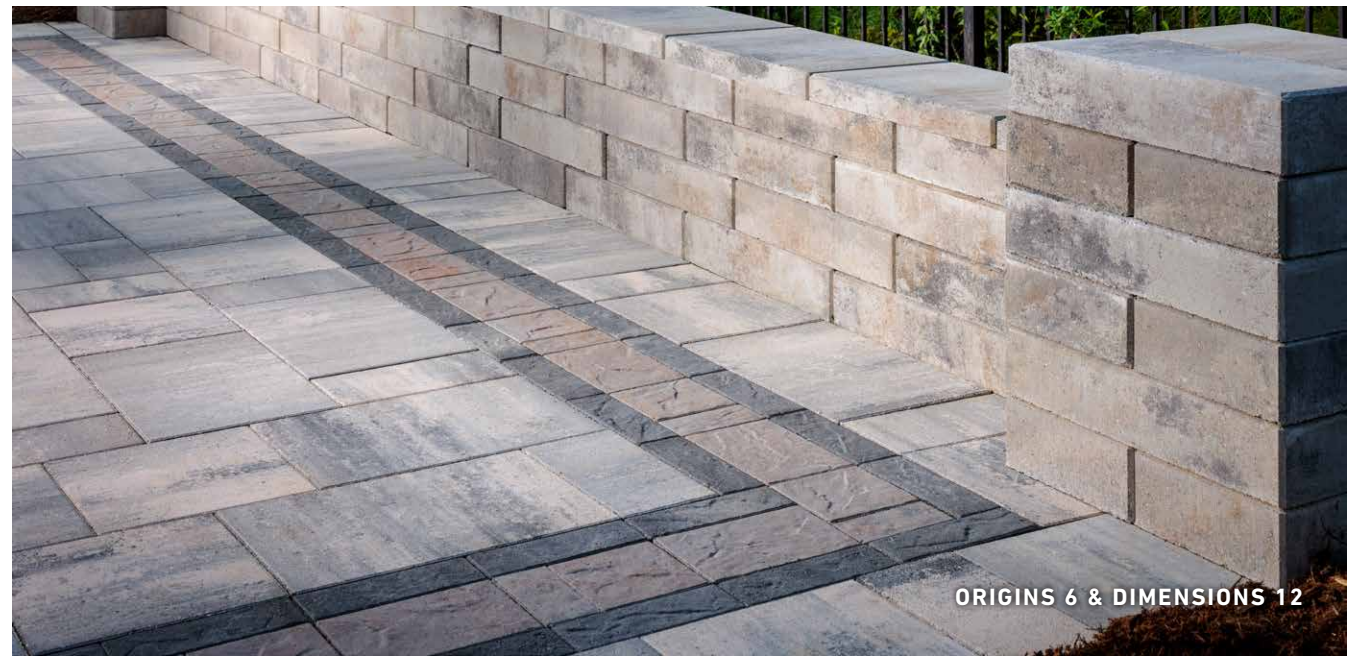
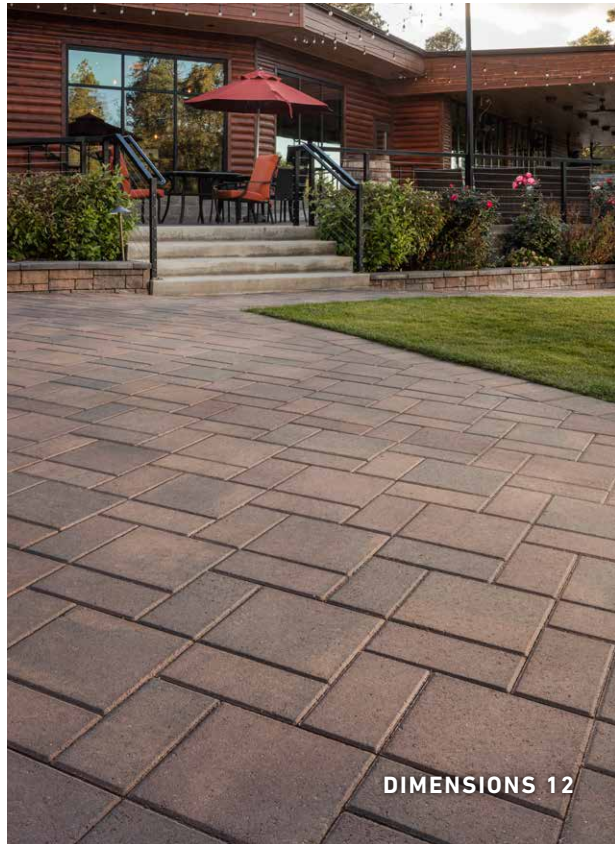


* May be Suitable for ADA applications. Always evaluate site-specific uses to ensure surface suitability. Product installation and surface maintenance influence compliance with ADA Standards for Accessible Design Section 302 Floors or Ground Surfaces. Tumbling or antiquing pavers can also create surface or edges that may make the product unsuitable for ADA applications.

Interlocking pavers can be used for a variety of different vehicular applications. Appropriate shape and thickness is based on project-specific conditions including type of loading, base design, and subgrade conditions. It is recommended that you consult a Belgard representative in your area before specifying products for vehicular applications.








Secondary processes and finishes including, but not limited to, face-grinding, may impact dimensional tolerances from base dimensions.



PERMEABLE PAVERS

UNITS	THICKNESS	SIZE	APPLICATIONS				ADA*	MECHANICAL INSTALL	FINISHES		MANUF. JOINT WIDTH	% SURFACE OPENING	CHAMFER WIDTH	SQ. FT. PER PALLET	PCS. PER PALLET	PALLET WEIGHT (LBS)
									Standard	Antiqued						
 3" x 12"	80 mm	3" x 12"	✓	✓			✓		✓		7 mm	10%	3 mm	88	352	2,810
 4½" x 9"	80 mm	4½" x 9"	✓	✓	✓	✓	✓	✓	✓		10 mm	10%	3 mm	90	320	3,105
 6" x 6"	80 mm	6" x 6"	✓	✓	✓		✓		✓		7 mm	7%	3 mm	84	336	2,775
 6" x 12"	80 mm	6" x 12"	✓	✓			✓		✓		7 mm	5%	3 mm	96	192	3,240
 9" x 9" L-Stone	80 mm	9" x 9"	✓	✓	✓	✓	✓	✓	✓		7 mm	7%	3 mm	90	128	3,240
 Ashlar 3-piece	80 mm	4½" x 4½" 4½" x 9" 9" x 9"	✓	✓	✓	✓	✓	✓	✓		10 mm	12%	3 mm	90	352	3,150

CONCRETE GRID PAVEMENTS


UNITS	THICKNESS	SIZE	APPLICATIONS				ADA	MECHANICAL INSTALL	FINISHES		% SURFACE OPENING	SQ. FT. PER PALLET	PCS. PER PALLET	PALLET WEIGHT (LBS)
									Standard	Antiqued				
 Turfstone™	80 mm	15¾" x 23⅝"	80 mm						✓		40%	128	50	3,000

* May be Suitable for ADA applications. Always evaluate site-specific uses to ensure surface suitability. Product installation and surface maintenance influence compliance with ADA Standards for Accessible Design Section 302 Floors or Ground Surfaces. Tumbling or antiquing pavers can also create surface or edges that may make the product unsuitable for ADA applications.

** Contact local representative for packing specifics.

Interlocking pavers can be used for a variety of different vehicular applications. Appropriate shape and thickness is based on project-specific conditions including type of loading, base design, and subgrade conditions. It is recommended that you consult a Belgard representative in your area before specifying products for vehicular applications.

Secondary processes and finishes including, but not limited to, face-grinding, may impact dimensional tolerances from base dimensions.

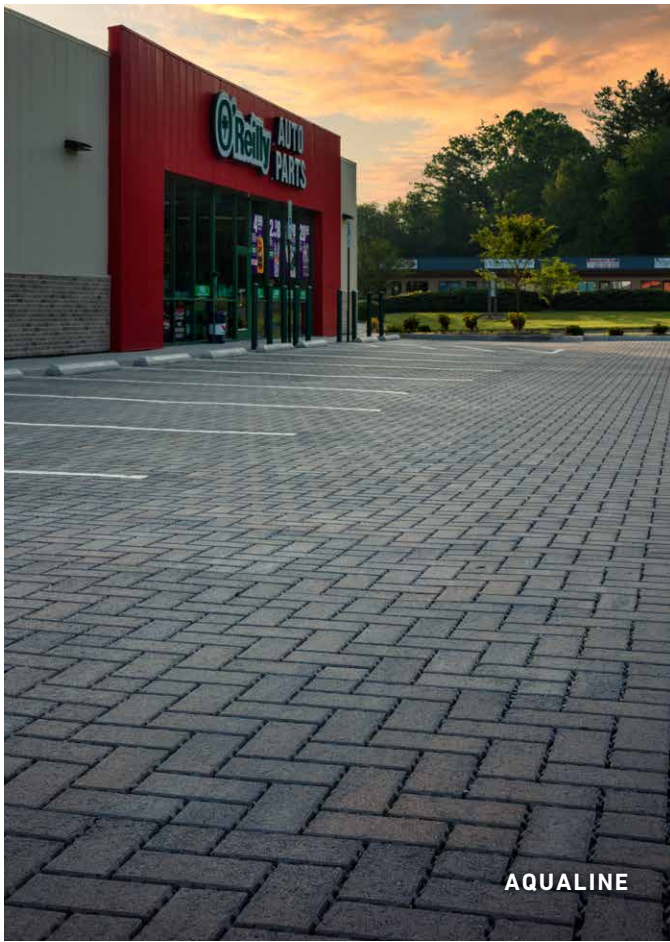

AQUALINE



AQUALINE




AQUALINE



AQUALINE



AQUALINE

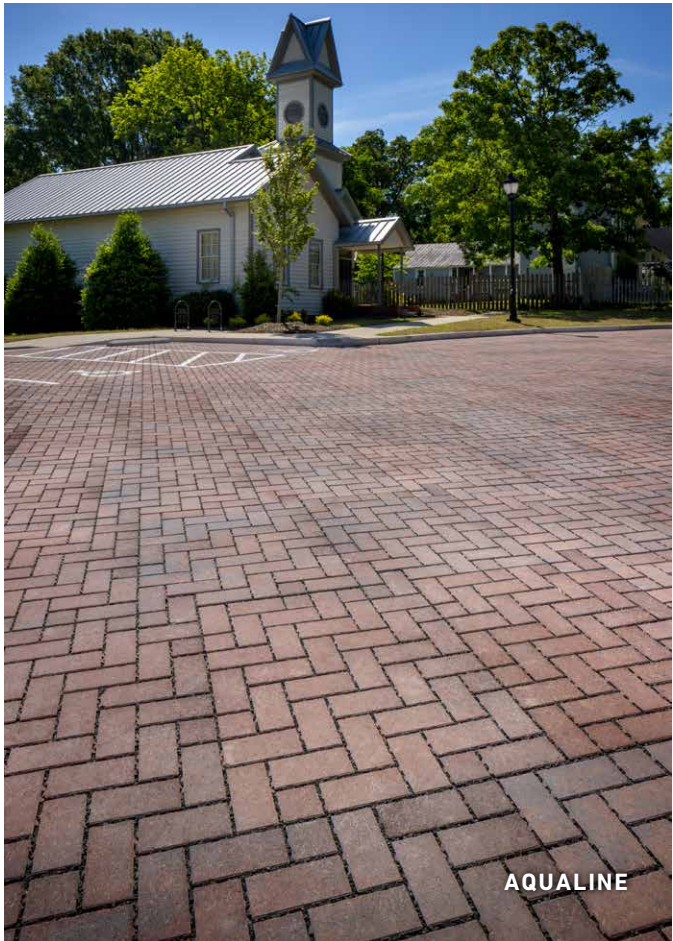

AQUALINE

PORCELAIN PAVERS

UNITS	APPEARANCE	THICKNESS	SIZE	COLOR OPTIONS	ADA	PEDESTAL APPLICATION	SQ. FT. PER PALLET	PCS. PER PALLET	PALLET WEIGHT (LBS)
									
 Foundation	Concrete	3/4"	24" x 24"	Amber Beige, Scandina Gray	✓	✓	275.04	72	2,533.8
 Genoa	Stone	3/4"	24" x 24"	Blanco, Crema	✓	✓	275.04	72	2,533.8
 Genoa	Stone	3/4"	12" x 24"	Blanco, Crema	✓	✓	303.6	80	2,807
 Noon	Wood	3/4"	8" x 48"	Daylight, Ember, Honey	✓	✓	151.8	60	1,380
 Quarziti 2.0	Stone	3/4"	24" x 24"	Glacier, Mountains, Waterfall, River	✓	✓	232.5	60	2,160



RESISTANT TO FREEZE THAW

Freeze thaw resistant—100% frost-free and properties remain unaltered at temperatures ranging from -51.1° to + 60° C (-60°F to +140°F).



RESISTANT TO BREAKAGE

Because every slab can withstand loads of over 2200 lbs.



RESISTANT TO CHEMICAL AGGRESSION

Because our pavers are unaffected by alkalis, acids, chemical agents, salt and other de-icing materials.



RESISTANT TO STAINS

Because a high density and ultra-low absorption rate creates a tight paver surface, it fends off surface mold, moss, dirt and other types of stains.



EASY TO LAY

Because of superior accuracy in dimensional sizing and linear sides, the pavers allow for perfectly executed installations with tight and accurate lines.



EASY TO CLEAN

Because it can be cleaned with normal household cleaners and even pressure washed with a **low pressure** washing device.**



EASY TO REMOVE

Because a 24" x 24" slab weighs just 37 lbs., its light weight permits easy removal, serviceability and even reusability. (Excluding adhered installations).



EASY FOR YOU

Because the structured top textures formed on the surface of our pavers create slip resistant surfaces.

If installing on elevated surface over 3/4" all porcelain must have a factory applied fiber mesh backing.

Spacers are required for all porcelain paver installations. For vehicular applications, there must be a mortar install over a concrete slab. Visit Belgard.com/porcelain for additional installation details.

ROOFTOP PAVERS & ACCESSORIES

UNITS	THICKNESS	SIZE	MATERIAL	FINISHES			PEDESTAL APPLICATION	PCS. PER PALLET	WEIGHT PER SQ. FT. (LBS)
				Smooth	Shot Blast	Diamond			
ROOFTOP PAVERS									
Classic Plaza Slab	1 7/8"	24" x 24"	Concrete	✓	✓	✓	✓	Varies 24-25 <i>Contact Belgard Representative for info</i>	23
Porcelain Plaza Pavers	3/4"	See page 14	Porcelain	✓			✓	-	-
Wood Plaza Paver	1.5"	24" x 24" 24" x 48"	Ipe Wood	✓			✓	-	5.56
ACCESSORIES									
Cubes & Cube Tops <i>(Made to order, custom sizes available)</i>	-	24" x 24" x 16 1/2" 48" x 24" x 16 1/2"	Ipe Wood or Powder Coated Aluminum	✓			✓	-	-
Pedestals - Fixed Height	-	1/4", 1/2", 3/4" height	-				✓	100 pcs per box	-
Pedestals - Adjustable	-	1 1/4" - 36" height*	-				✓	30 pcs per box	-

Classic Plaza Slab Colors



Chamois



Charcoal



Ginger



SRI White**



Cinnamon



Limestone



Natural




Red



* Higher heights require extension couplers. Additionally, heights over 24" require bracing.


**SRI Color - Solar Reflective Index in excess of 80

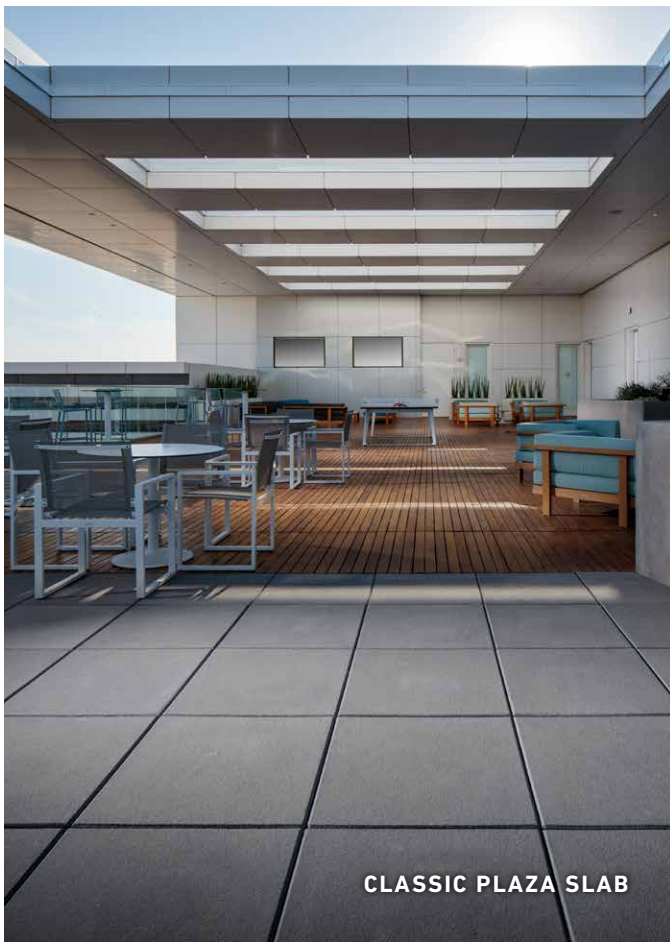


CLASSIC PLAZA SLAB



FOUNDATION
AMBER BEIGE

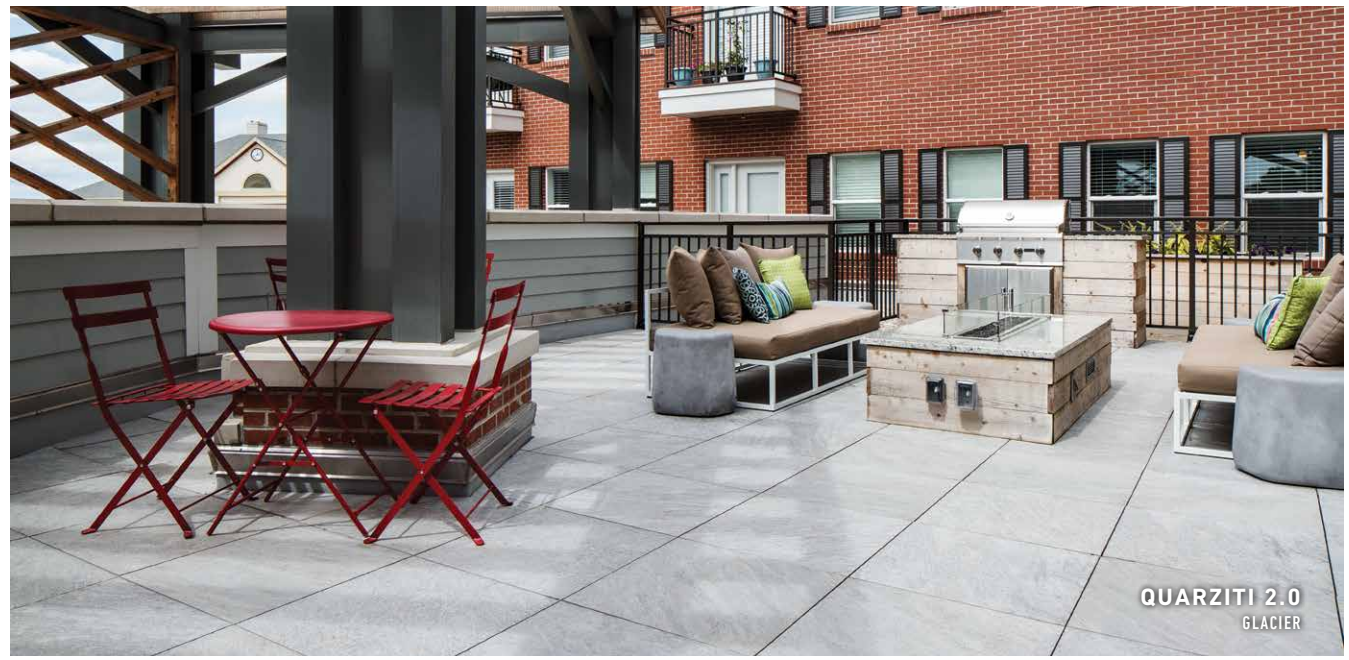


QUARZITI 2.0
GLACIER

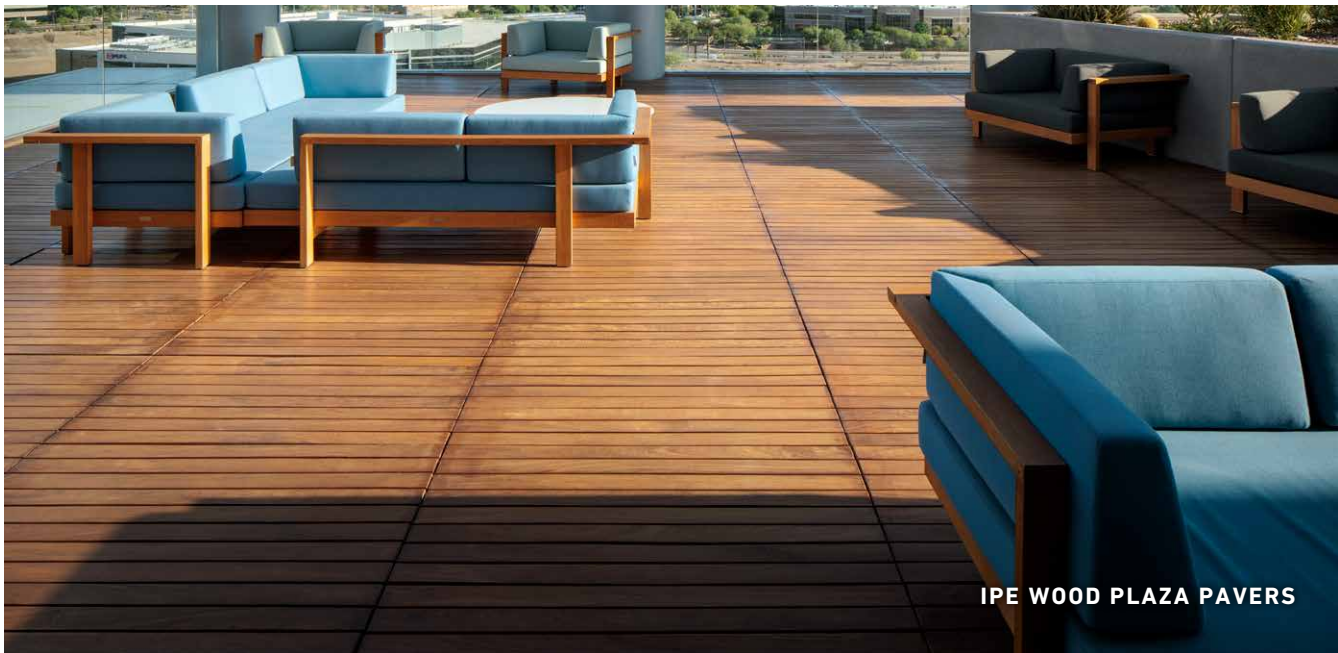

IPE WOOD PLAZA PAVERS




NOON
DAYLIGHT

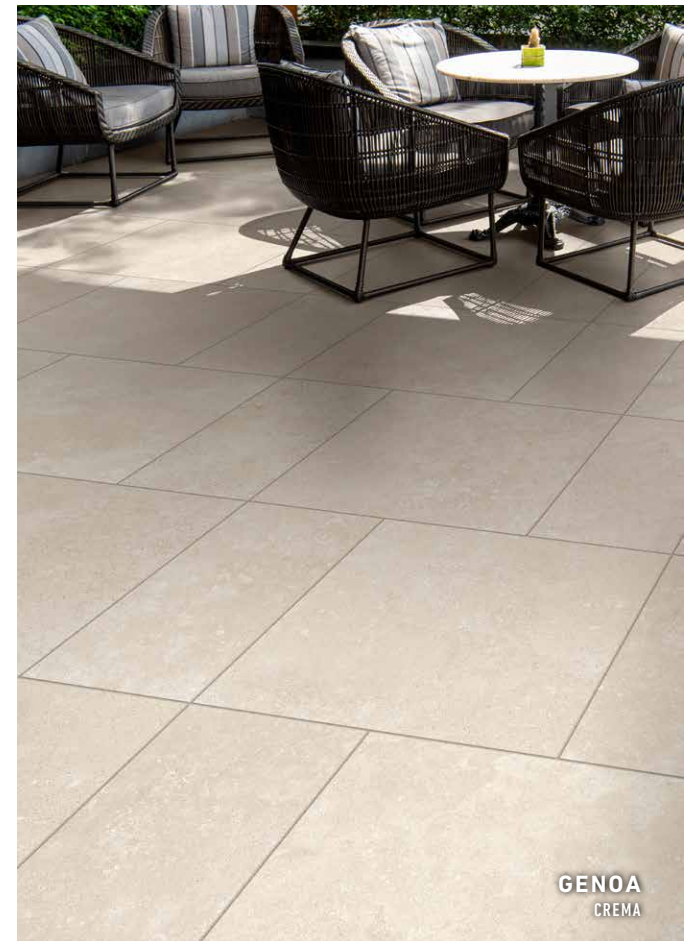


GENOA
CREMA

SEGMENTAL RETAINING & FREESTANDING WALLS (SRW & FSW)


UNITS	UNIT SIZE			CONNECTION TYPE		ACCESSORIES* (SOLD SEPARATELY)		TEXTURE			FACE STYLES				BATTER/ SETBACK	SQ. FT. PER PALLET	PCS. PER PALLET	PALLET WEIGHT (LBS)
	Height	Width	Depth	Block	Other	Column/ Corner Unit	Cap Unit	Sculpted	Split	Tumbled	Beveled	Virtual Joint	Universal	Stone Cut				
 Ashlar Tandem™	7"	13⅜" 15⅜" 18"	3"		Polypropylene Connectors <i>(sold separately)</i>		✓	✓					✓		0/4°	70	90	2,082
 Castlemanor® Grana	6"	6", 12", 16" <i>(long side dimension)</i>	10"		Fiberglass Pins <i>(sold separately)</i>		✓			✓			✓		0° and 9.5°	32.3	75	3,431
 CornerStone® 100 <i>(Available in western NC and upstate SC)</i>	8"	18"	12"	Lug System		✓	✓		✓				✓		4.5°	40	40	2,750
 Diamond Pro®	8"	18"	12"	Rear Lip		✓	✓		✓				✓		7.1°	45	45	3,465
 Diamond Pro® 9D	8"	18"	9"	Rear Lip		✓	✓		✓				✓		7.1°	48	48	2,880
 Diamond Pro® 9D Vintage	8"	18"	9"	Rear Lip		✓	✓		✓			✓			7.1°	48	48	2,880
 Diamond Pro® Vintage	8"	18"	12"	Rear Lip		✓	✓		✓			✓			7.1°	45	45	3,465
 Diamond Pro® PS	8"	18"	12"		Fiberglass Pins <i>(sold separately)</i>	✓	✓		✓				✓		1.7° or 7.1°	45	45	3,330
 Diamond Pro® PS Vintage	8"	18"	12"		Fiberglass Pins <i>(sold separately)</i>	✓	✓		✓			✓			1.7° or 7.1°	45	45	3,330
 Diamond Pro® PS 21D	8"	18"	21"		Fiberglass Pins <i>(sold separately)</i>	✓	✓		✓				✓		1.7° or 7.1°	30	30	3,170
 Highland Stone®	6"	17¾"	9"	Rear Lip		✓	✓		✓				✓		10.6°	44.5	60	3,300
 Highland Stone® Freestanding Wall	6"	6" - 4" 12" - 10"	9"			✓	✓		✓				✓		Vertical	26.8	80	2750
 Highland Stone® Freestanding Wall	6"	18" - 16"	9"			✓	✓		✓				✓		Vertical	35.5	50	3550
 Melville Tandem™	7"	13⅜" 15⅜" 18"	3"		Polypropylene Connectors <i>(sold separately)</i>		✓						✓		0/4°	70	90	2,082

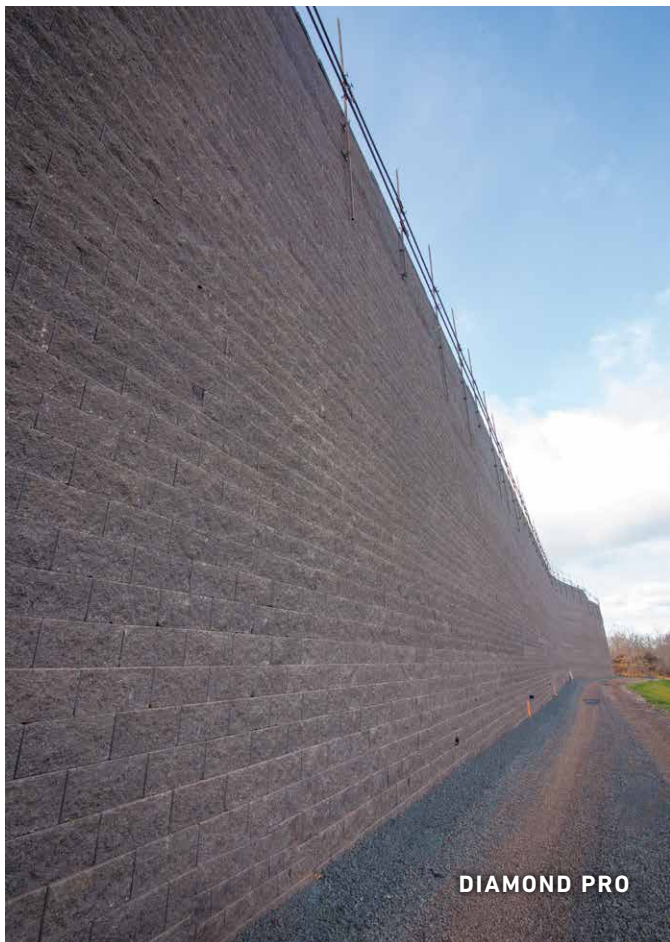

DIAMOND PRO

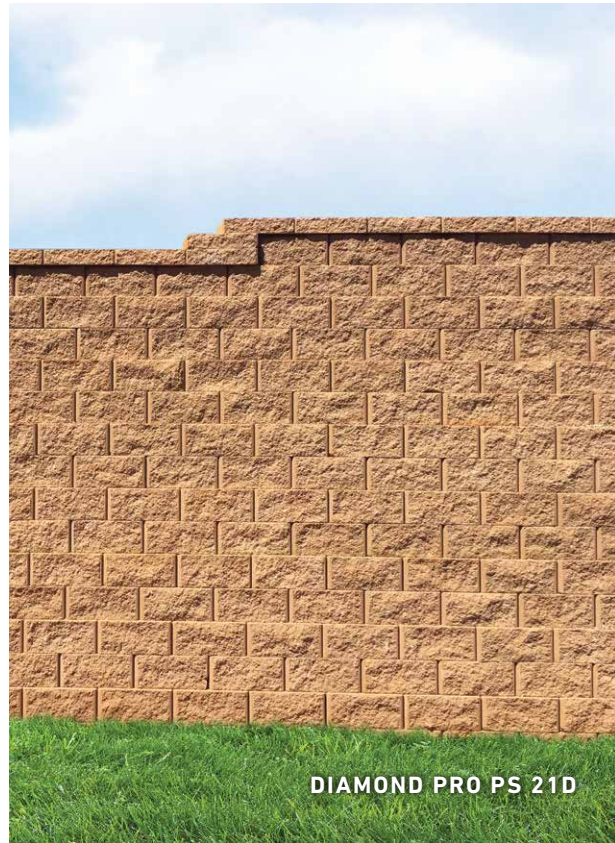


DIAMOND PRO PS 21D

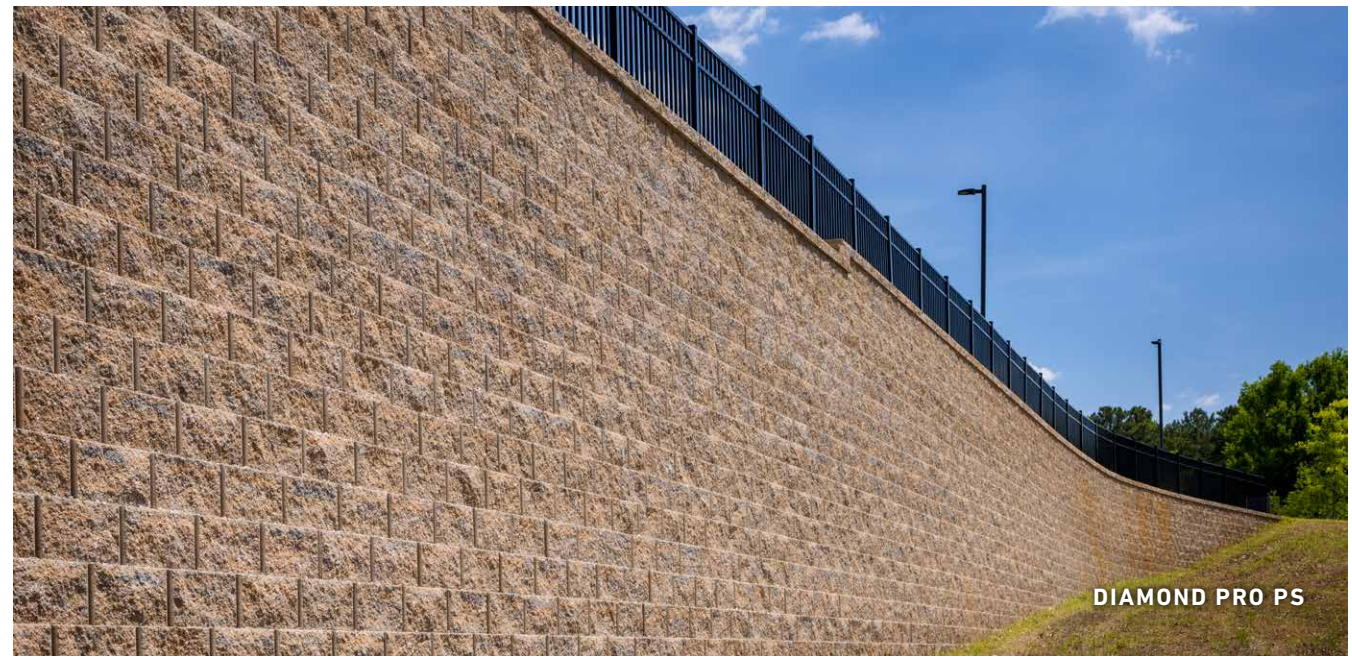

DIAMOND PRO PS



MELVILLE TANDEM

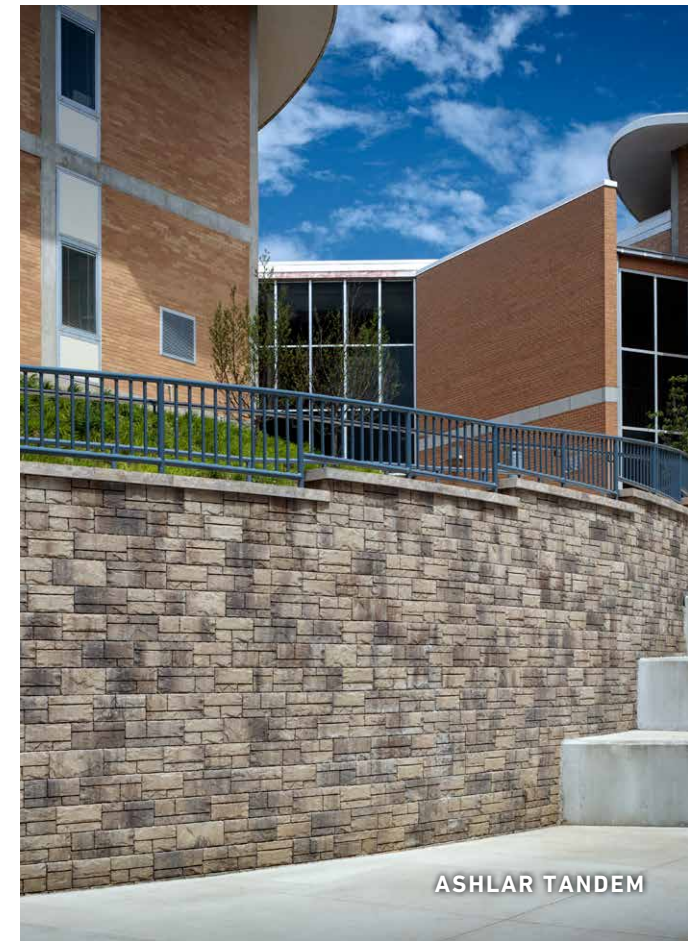

ASHLAR TANDEM



CASTLEMANOR GRANA

COMPLEMENTARY PRODUCTS

PRODUCT	SIZE	PALLET INFORMATION
 Castlemanor® Grana Cap	3" x 10" x 12"	–
 Capstone	3" x 18" x 12"	–
 Diamond Pro® Cap	4" x 18" x 12"	56 units per pallet
 Highland Stone® Cap	3" x 17.25" / 10.38" x 9"	80 units per pallet
 Tandem® Cap	15" x 24" x 3¼"	32 units per pallet



DIAMOND PRO VINTAGE

PROFESSIONAL SUPPORT



ENVIRONMENTAL SOLUTIONS

Belgard consultants can work with your team to develop the best PICP system design or retaining wall configuration to control runoff volume and discharge rates, improve the quality of local groundwater, reduce or prevent downstream impacts, and minimize the land consumed for stormwater management.



CAD FILES

For your convenience, Belgard offers a constantly expanding library of easy-to-download CAD files of our products and patterns.



CONTINUING EDUCATION

Belgard offers a variety of ongoing educational programs for our industry partners, including Lunch & Learns, online CEU courses, and our Belgard University training program.



SITE PLANNING

The experts at Belgard can help you optimize your site in a number of ways—whether you're looking for creative ways to define public spaces, manage or harvest stormwater, or increase the useable space for development.



ENGINEERING SERVICES

Our team of design consultants can help address both aesthetic and engineering design concerns, material quantity estimates and permit ready plans.

BELGARD OF THE CAROLINAS



Adams Sales & Customer Service Office
625 Griffith Rd, Suite 115
Charlotte, NC 28217
Ph: 800-545-5080



[BELGARDCOMMERCIAL.COM](https://www.belgardcommercial.com)