

COMMERCIAL

2024

PRODUCT OFFERING

SOUTHWEST

ARIZONA & NEW MEXICO



BELGARD
COMMERCIAL



PAVER APPLICATIONS



Pedestrian

Designated for areas that are primarily for pedestrian applications including commercial plazas that may require occasional access for emergency or maintenance vehicles, as well as residential driveways.



Light Vehicles

Designated for commercial vehicular areas, access ways, and parking lots where only cars and light trucks are anticipated. Heavy vehicles should have limited access and use.



Occasional Heavy Vehicles

Designated for vehicular areas, parking lots, and roadways where limited heavy vehicles are anticipated daily such as large delivery trucks or garbage trucks.



Frequent Heavy Vehicles

Designated for vehicular areas, parking lots, and roadways where heavy vehicles are a regular component of the daily traffic volume.

Paver application icons are general recommendations. Site conditions and pavement cross section must be considered. Paver application icons are based on placement over unbound aggregates for setting beds, base and subbase.


BELGARD PAVER COLORS & FINISHES



SMOOTH SHOT BLAST GROUND FACE


Belgard Commercial allows you to customize your project with optional finishes: Smooth, Shot Blast and Ground face. Contact your Belgard Commercial Representative for more information.

Contact your Belgard Representative for custom finish options and sample products, as well as ADA Compliant products.

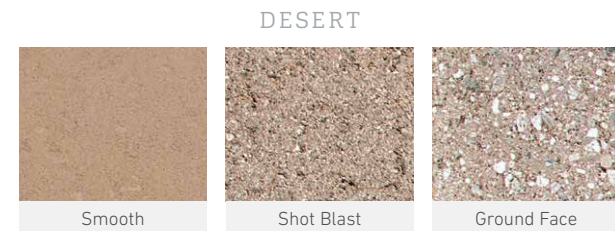


DESERT

Smooth Shot Blast Ground Face

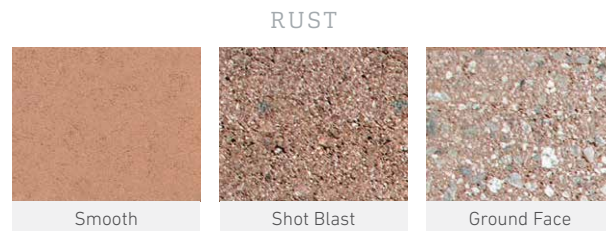


RUST

Smooth Shot Blast Ground Face

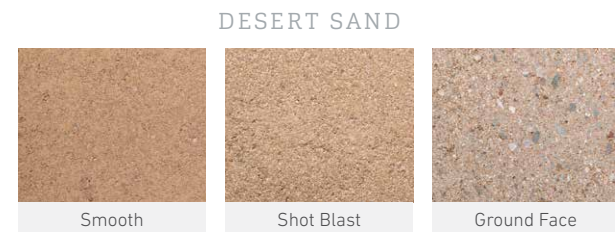

DESERT SAND

Smooth Shot Blast Ground Face

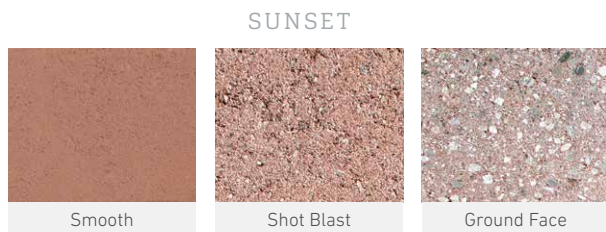


SUNSET

Smooth Shot Blast Ground Face




BURNT UMBER

Smooth Shot Blast Ground Face

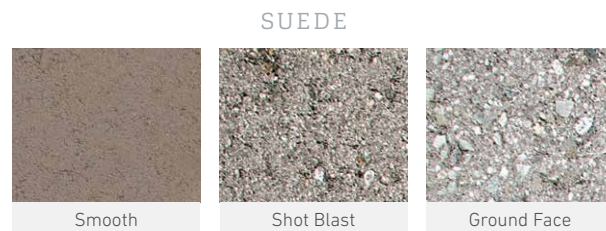


SUEDE

Smooth Shot Blast Ground Face

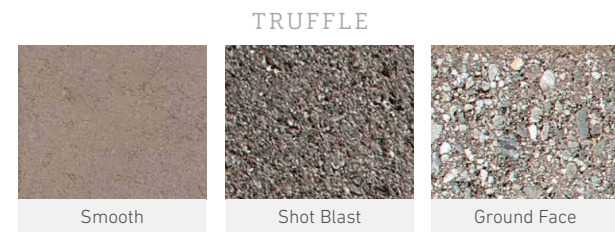

TRUFFLE

Smooth Shot Blast Ground Face

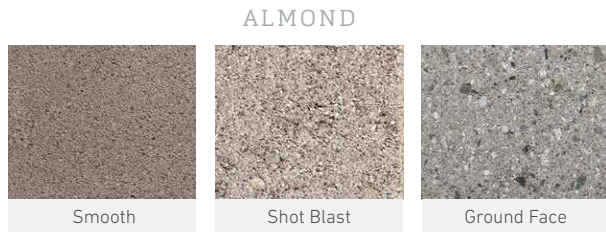


ALMOND

Smooth Shot Blast Ground Face



MONSOON GREY

Smooth Shot Blast Ground Face

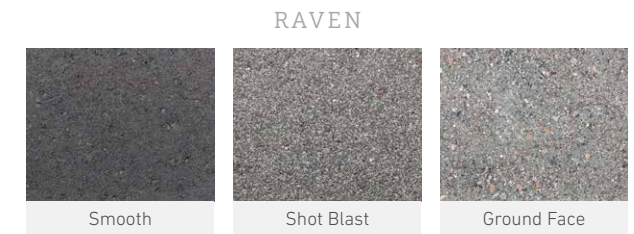

RAVEN

Smooth Shot Blast Ground Face



GRAPHITE

Smooth Shot Blast Ground Face



FOUNDRY

Smooth Shot Blast Ground Face




GREY MIST

Smooth Shot Blast Ground Face



TONOPAH WHITE

Smooth Shot Blast Ground Face

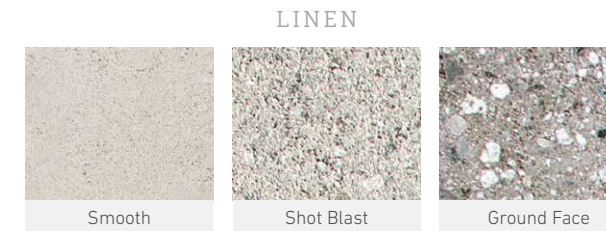












LINEN

Smooth Shot Blast Ground Face

BLENDED COLORS



MODULINE SERIES® VEHICULAR & ARCHITECTURAL PAVERS

UNITS	THICKNESS	SIZE	APPLICATIONS				ADA*	MECHANICAL INSTALL	FINISHES				CHAMFER WIDTH	SQ. FT. PER PALLET
											Standard	Ground Face		
 4" x 12"	80 mm	4" x 12"	80 mm	80mm			✓		✓	✓	✓		3 mm	85
 4" x 18"	80 mm	4" x 18"	80 mm				✓		✓	✓	✓		3 mm	36
 4" x 24"	80 mm	4" x 24"	80 mm				✓		✓	✓	✓		3 mm	48
 3-Piece Modular	80 mm	6" x 6", 6" x 12", 12" x 12"	80 mm	80 mm			✓		✓	✓	✓	✓	3 mm	96
 5-Piece Modular	80 mm	6" x 6", 6" x 9", 9" x 9", 6" x 12", 9" x 12"	80 mm	80 mm			✓	✓	✓	✓	✓	✓	3 mm	96

DIMENSIONS™ SERIES VEHICULAR & ARCHITECTURAL PAVERS

UNITS	THICKNESS	SIZE	APPLICATIONS				ADA*	MECHANICAL INSTALL	FINISHES					CHAMFER WIDTH	SQ. FT. PER PALLET
											Standard	Ground Face	Shot Blast		
 3" x 9"	80 mm	3" x 9"	80 mm	80 mm	80 mm	80 mm	✓		✓	✓	✓	✓	✓	3 mm	90
 3" x 12" (60 mm available in Striated face style)	60 mm 80 mm 101.6 mm	3" x 12"	60 mm	80 mm	101.6 mm		✓		✓	✓	✓			3 mm	55 (60 mm) 44 (80 mm) 66 (101.6 mm)
 6" x 6"	60 mm 80 mm 101.6 mm	6" x 6"	60 mm	80 mm	80 mm 101.6 mm		✓		✓	✓	✓	✓		3 mm	120 (60 mm) 96 (80 mm) 72 (101.6 mm)
 6" x 9"	60 mm 80 mm	6" x 9"	60 mm	80 mm	80 mm	80 mm	✓		✓	✓	✓	✓		3 mm	112.5 (60 mm) 90 (80 mm)
 6" x 12"	60 mm 80 mm 101.6 mm	6" x 12"	60 mm	80 mm	101.6 mm	101.6 mm	✓		✓	✓	✓	✓		3 mm	120 (60 mm) 96 (80 mm) 72 (101.6 mm)
 9" x 9"	80 mm	9" x 9"	80 mm	80 mm	80mm		✓		✓	✓	✓	✓		3 mm	90
 12" x 12"	60 mm 80 mm 101.6 mm	12" x 12"	60 mm	80 mm 101.6 mm	101.6 mm		✓		✓	✓	✓	✓		3 mm	120 (60 mm) 96 (80 mm) 72 (101.6 mm)
 12" x 24"	60 mm	12" x 24"	60 mm				✓		✓	✓	✓		✓	3 mm	120
 18" x 24"	60 mm	18" x 24"	60 mm				✓		✓	✓				3 mm	120
 24" x 24"	60 mm	24" x 24"	60 mm				✓		✓				✓	3 mm	80
 Dimensions™ 18	60 mm	9" x 18" 18" x 18" 27" x 18"	60 mm				✓		✓				✓	3 mm	112.5
 Dimensions™ 12	60 mm	6" x 12" 12" x 12" 12" x 18"	60 mm				✓		✓	✓	✓		✓	3 mm	120
 Dimensions™ 6	60 mm	3" x 6" 6" x 6" 6" x 9"	60 mm				✓		✓	✓	✓	✓	✓	3 mm	120

* May be Suitable for ADA applications. Always evaluate site-specific uses to ensure surface suitability. Product installation and surface maintenance influence compliance with ADA Standards for Accessible Design Section 302 Floors or Ground Surfaces. Tumbling or antiquing pavers can also create surface or edges that may make the product unsuitable for ADA applications.

Note: The Moduline & Dimensions Series is all made to order. Lead times will apply. Check with your local Belgard representative for applicable lead times.


Secondary processes and finishes including, but not limited to, face-grind and shot blast, may impact dimensional tolerances from base dimensions.




FOUNDRY & GRAPHITE




RIO BLEND

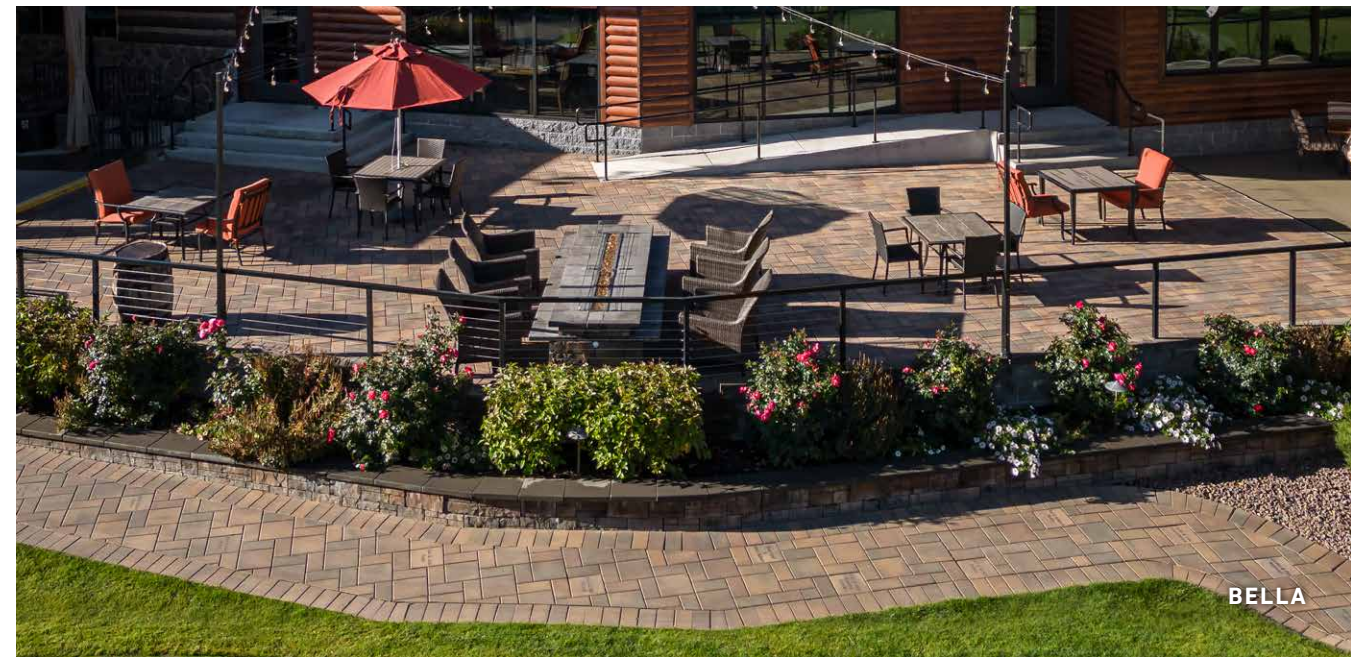

BELLA

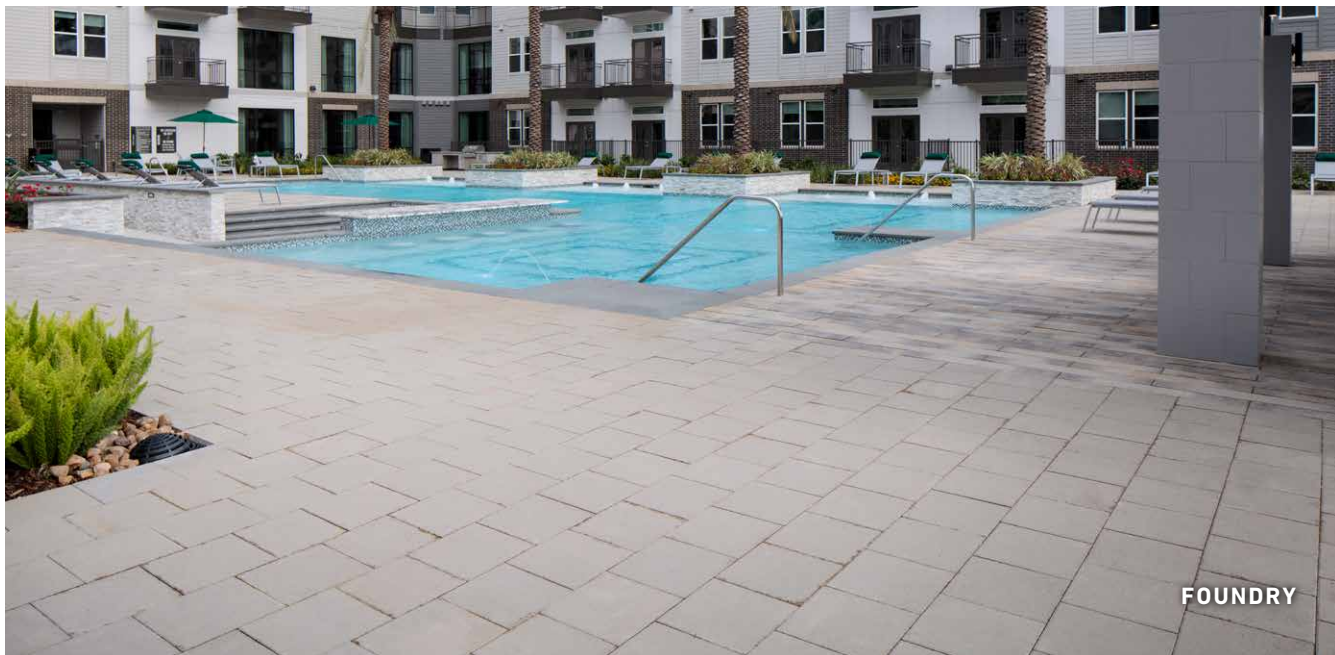

FOUNDRY

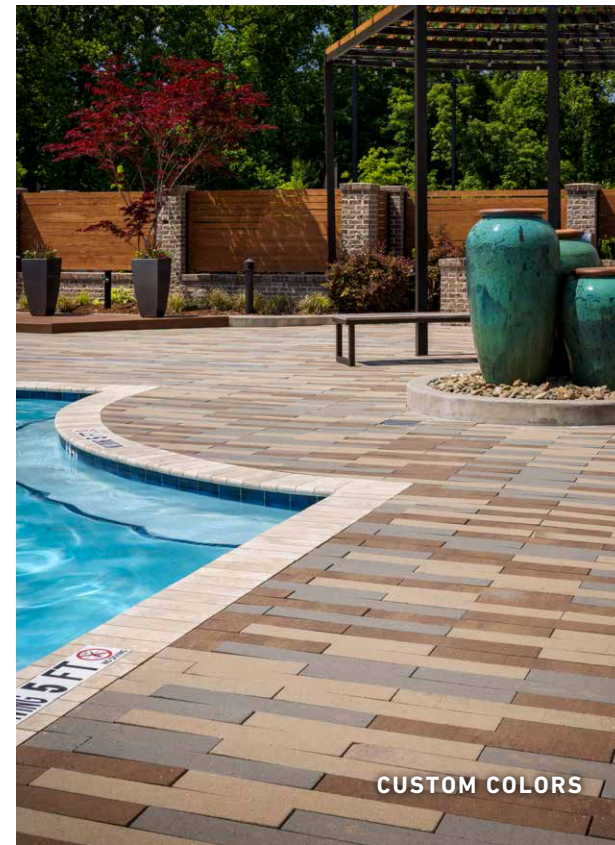

CUSTOM COLORS



LINEN

PICTURED ON SPREAD:
DIMENSIONS & MODULINE SERIES

VEHICULAR & ARCHITECTURAL PAVERS

UNITS	THICKNESS	SIZE	APPLICATIONS				ADA*	MECHANICAL INSTALL	FINISHES					CHAMFER WIDTH	SQ. FT. PER PALLET	
									Standard	Ground Face	Shot Blast	Antiqued	DuraFusion			
 Avalon Slate (3 pc)	60 mm	6" x 12" 9" x 12" 12" x 12"	60 mm					✓		✓					4 mm	120
 Bergerac® (3 pc)	60 mm	3 ³ / ₁₆ " x 7 ¹ / ₁₆ " 7 ¹ / ₁₆ " x 7 ¹ / ₁₆ " 7 ¹ / ₁₆ " x 10 ⁵ / ₁₆ "	60 mm							✓			✓		N/A	113
 Bergerac® (Lg Square)	60 mm	10 ⁵ / ₁₆ " x 10 ⁵ / ₁₆ "	60 mm							✓			✓		N/A	89
 Basalt™ 18	60 mm	18" x 9" 18" x 18" 18" x 27"	60 mm					✓		✓				✓	3 mm	112.5
 Cambridge Cobble® (3 pc)	60 mm	3" x 6" 6" x 6" 6" x 9"	60 mm							✓			✓		N/A	120
 Cambridge Cobble®	60 mm 80 mm	6" x 9"	60 mm	80 mm	80 mm	80 mm				✓			✓		N/A	112 (60 mm) 90 (80 mm)
 Cambridge Cobble®	60 mm 80 mm	6" x 6"	60 mm							✓			✓		N/A	120 (60 mm) 96 (80 mm)
 Cambridge Cobble® (Circle Kit)	60 mm	6" x various	60 mm							✓			✓		N/A	79
 Catalina Grana® (3 pc)	60 mm	6" x 12" 9" x 12" 12" x 12"	60 mm					✓		✓				✓	4 mm	120
 Dimensions™ Terrazzo 12	60 mm	6" x 12" 12" x 12" 12" x 18"	60 mm					✓			✓					120
 Dublin Cobble® (3 pc)	60 mm	3" x 6" 6" x 6" 6" x 9"	60 mm							✓	✓	✓	✓		N/A	114
 Dublin Cobble® (Lg Square)	60 mm	9" x 9"	60 mm							✓	✓	✓	✓		N/A	106
 Empire	60 mm	3" x 12"	60 mm					✓		✓				✓		110
 Holland Stone 4 x 4	80 mm	4" x 4"	80 mm	80 mm	80 mm			✓		✓	✓	✓	✓		4 mm	96 (80 mm)
 Holland Stone 4 x 8	60 mm 80 mm	4" x 8"	60 mm	80 mm	80 mm	80 mm		✓		✓	✓	✓	✓		7 mm	120 (60 mm) 96 (80 mm)
 Holland Stone 8 x 8	80 mm	8" x 8"	80 mm	80 mm	80 mm			✓		✓	✓	✓	✓		4 mm	94.8 (80 mm)
 Lafitt™ Grana Slab	50 mm	7 ³ / ₈ " x 14 ⁷ / ₈ " 14 ⁷ / ₈ " x 14 ⁷ / ₈ " 14 ⁷ / ₈ " x 22 ³ / ₈ "	50 mm					✓		✓	✓				4.5 mm	163.2
 Lafitt™ Rustic Slab	50 mm	7 ³ / ₈ " x 14 ⁷ / ₈ " 14 ⁷ / ₈ " x 14 ⁷ / ₈ " 14 ⁷ / ₈ " x 22 ³ / ₈ "	50 mm					✓		✓					Variable	163.2
 Mega-Bergerac® (3 pc)	80 mm	4 ³ / ₁₆ " x 9 ⁷ / ₁₆ " 9 ⁷ / ₁₆ " x 9 ⁷ / ₁₆ " 9 ⁷ / ₁₆ " x 14 ³ / ₁₆ "	80 mm										✓		N/A	88
 Mega-Bergerac® (Lg Square)	80 mm	14 ³ / ₁₆ " x 14 ³ / ₁₆ "	80 mm										✓		N/A	68
 Mega-Lafitt™	80 mm	5 ¹ / ₂ " x 10 ¹ / ₂ " 10 ¹ / ₂ " x 10 ¹ / ₂ " 10 ¹ / ₂ " x 15 ³ / ₄ "	80 mm										✓		N/A	93

Interlocking pavers can be used for a variety of different vehicular applications. Appropriate shape and thickness is based on project-specific conditions including type of loading, base design, and subgrade conditions. It is recommended that you consult a Belgard representative in your area before specifying products for vehicular applications.











Secondary processes and finishes including, but not limited to, face-grind and shot blast, may impact dimensional tolerances from base dimensions.

* May be Suitable for ADA applications. Always evaluate site-specific uses to ensure surface suitability. Product installation and surface maintenance influence compliance with ADA Standards for Accessible Design Section 302 Floors or Ground Surfaces. Tumbling or antiquing pavers can also create surface or edges that may make the product unsuitable for ADA applications.

VEHICULAR & ARCHITECTURAL PAVERS (CONTINUED)


UNITS	THICKNESS	SIZE	APPLICATIONS				ADA*	MECHANICAL INSTALL	FINISHES					CHAMFER WIDTH	SQ. FT. PER PALLET
									Standard	Ground Face	Shot Blast	Antiqued	DuraFusion		
 Mega-Lafitt™ (Lg Square)	80 mm	15¾" x 15¾"	80 mm								✓			N/A	93
 Mega-Lafitt™ Grana (3 pc)	80 mm	5¼" x 10½" 10½" x 10½" 10½" x 15¾"	80 mm						✓	✓	✓	✓		N/A	93
 Mega-Lafitt™ Grana (Lg Square)	80 mm	15¾" x 15¾"	80 mm						✓	✓	✓	✓		N/A	93
 Mega-Arbel®	60 mm 80 mm	15¾" x 21"	60 mm						✓					N/A	104 (60 mm) 78 (80 mm)
 Melville™ Plank Slim	60 mm	5" x 11¼" 5" x 15¾" 5" x 19¼"	60 mm				✓		✓	✓	✓			3 mm	114.5
 Melville™ Plank Large	60 mm	7½" x 11¼" 7½" x 15¾" 7½" x 19¼"	60 mm				✓		✓	✓	✓			3 mm	122.7
 Old World Paver™	80 mm	5⅞" x 7¾" 5⅞" x 10¼" 5⅞" x 12¾"	80 mm									✓		N/A	90.27
 Origins™ 18	60 mm	9" x 18" 18" x 18" 27" x 18"	60 mm				✓		✓					3 mm	112.5
 Origins™ 12	60 mm	6" x 12" 12" x 12" 12" x 18"	60 mm				✓		✓					3 mm	120
 Origins™ 6	60 mm	3" x 6" 6" x 6" 6" x 9"	60 mm				✓		✓					3 mm	120
 Papyrus™ 18	60 mm	18" x 9" 18" x 18" 18" x 27"	60 mm				✓		✓				✓	3 mm	112.5

GEOMETRIC SHAPES





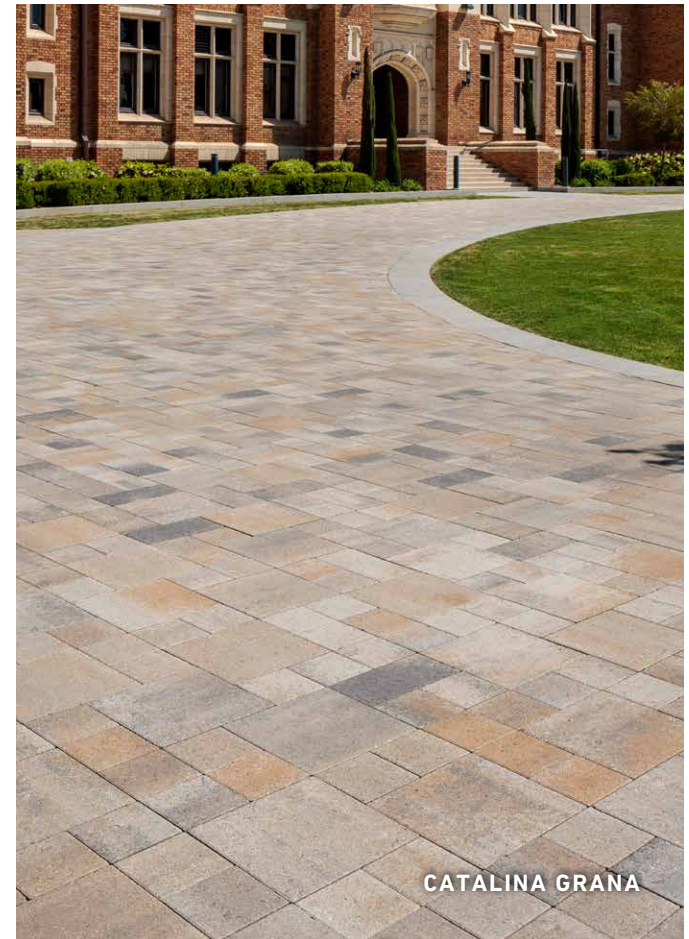






UNITS	THICKNESS	SIZE	APPLICATIONS				ADA*	MECHANICAL INSTALL	FINISHES					CHAMFER WIDTH	SQ. FT. PER PALLET
									Standard	Ground Face	Shot Blast	Antiqued	DuraFusion		
 Diamond	60 mm	12" x 12"	60 mm				✓		✓	✓	✓		✓	3 mm	93.53
 12" Parallelogram	60 mm	3" x 12"	60 mm				✓		✓	✓	✓		✓	3 mm	85.73
 18" Parallelogram	60 mm	6" x 18"	60 mm				✓		✓	✓	✓		✓	3 mm	114.31
 Hexagon	60 mm	12" x 12"	60 mm				✓		✓	✓	✓		✓	3 mm	100.02

Secondary processes and finishes including, but not limited to, face-grind and shot blast, may impact dimensional tolerances from base dimensions.








* May be Suitable for ADA applications. Always evaluate site-specific uses to ensure surface suitability. Product installation and surface maintenance influence compliance with ADA Standards for Accessible Design Section 302 Floors or Ground Surfaces. Tumbling or antiquing pavers can also create surface or edges that may make the product unsuitable for ADA applications.










PERMEABLE PAVERS

UNITS	THICKNESS	SIZE	APPLICATIONS				ADA*	MECHANICAL INSTALL	FINISHES				MANUF. JOINT WIDTH	% SURFACE OPENING	CHAMFER WIDTH	SQ. FT. PER PALLET
											Standard	Ground Face				
AQUALINE™ SERIES																
 3" x 12"	80 mm	3" x 12"	80 mm	80 mm			✓		✓	✓	✓	✓	7 mm	10%	3 mm	88
 6" x 6"	80 mm	6" x 6"	80 mm	80 mm	80 mm		✓		✓	✓	✓	✓	7 mm	7%	3 mm	96
 6" x 12"	80 mm	6" x 12"	80 mm	80 mm			✓		✓	✓	✓	✓	7 mm	5%	3 mm	96
 12" x 12"	80 mm	12" x 12"	80 mm	80 mm			✓		✓	✓	✓	✓	7 mm	3%	3 mm	96
ADDITIONAL PRODUCT LINES																
 Aqua Roc™	80 mm	4½" x 9"	80 mm	80 mm	80 mm	80 mm	✓		✓	✓	✓	✓	8 mm	9%	3 mm	90

CONCRETE GRID PAVEMENTS




UNITS	THICKNESS	SIZE	APPLICATIONS				ADA*	MECHANICAL INSTALL	FINISHES				% SURFACE OPENING	SQ. FT. PER PALLET		
											Standard	Ground Face			Shot Blast	Antiqued
 Turfstone™	80 mm	15¾" x 23⅝"	80 mm						✓					40%		101

COPING

UNITS	THICKNESS	SIZE	APPLICATIONS				ADA*	FINISHES			CHAMFER WIDTH	SQ. FT. PER PALLET
									Standard	Ground Face		
 Laguna™ Coping	60 mm	14¾" x 23⅝"					✓	✓	✓			
 Marina® Coping	60 mm	5⅞" x 11⅜"					✓	✓		✓		81
Terrazzo Coping	60 mm	12" x 24"					✓		✓			120

Secondary processes and finishes including, but not limited to, face-grind and shot blast, may impact dimensional tolerances from base dimensions.

* May be Suitable for ADA applications. Always evaluate site-specific uses to ensure surface suitability. Product installation and surface maintenance influence compliance with ADA Standards for Accessible Design Section 302 Floors or Ground Surfaces. Tumbling or antiquing pavers can also create surface or edges that may make the product unsuitable for ADA applications.

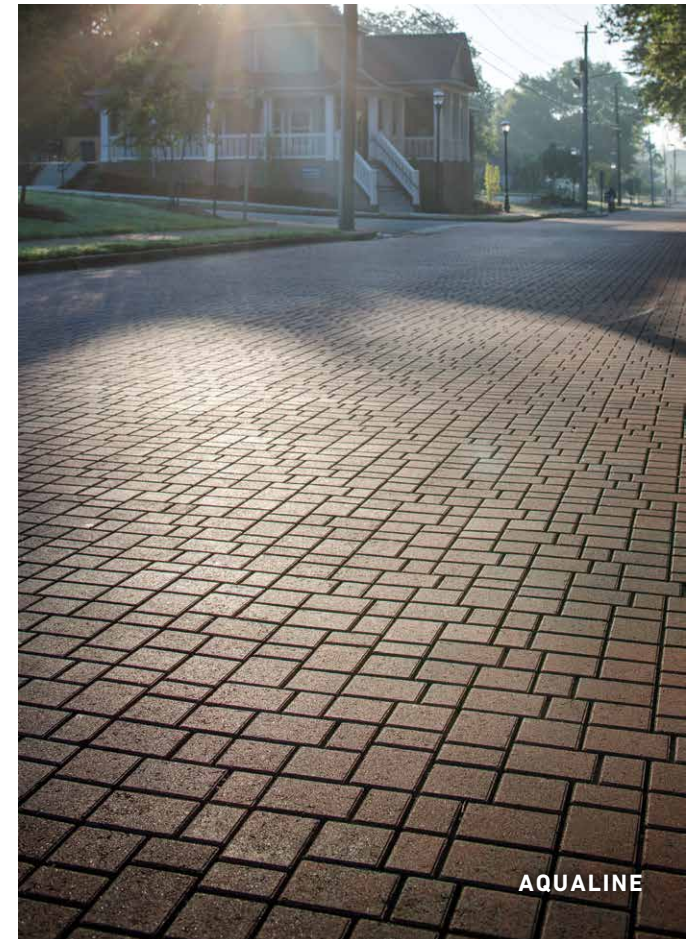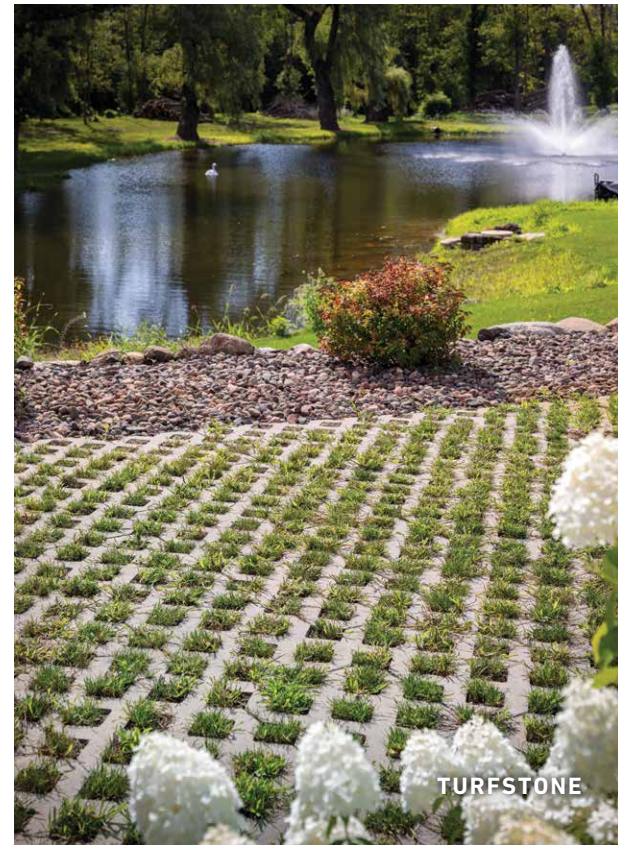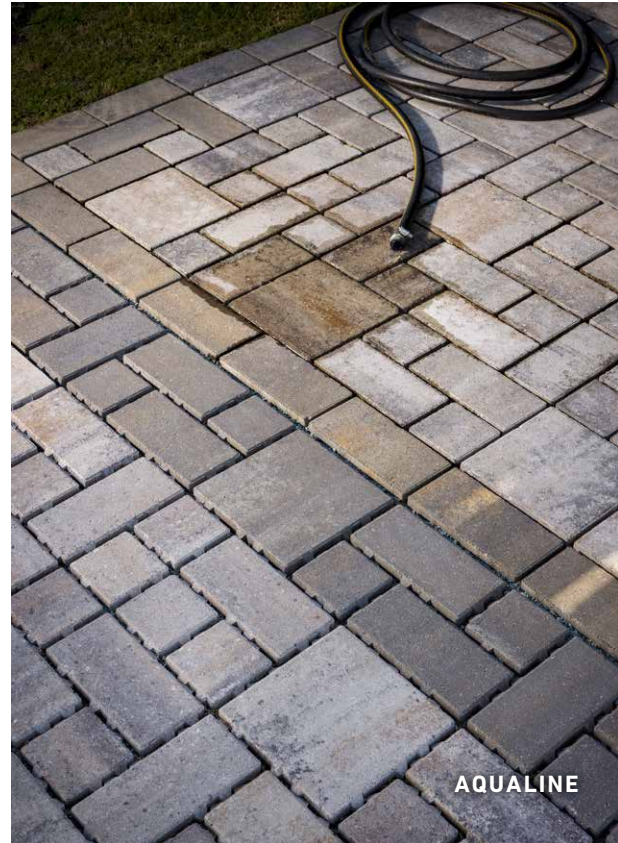

PORCELAIN PAVERS

UNITS	APPEARANCE	THICKNESS	SIZE	COLOR OPTIONS	ADA	PEDESTAL APPLICATION	SQ. FT. PER PALLET	PCS. PER PALLET	PALLET WEIGHT (LBS)
									
 Elysian Travertini	Travertine	¾"	24" x 24"	Light, Dark, Pearly Cross, Light Cross	✓	✓	275.04	72	2,517.36
 Foundation	Concrete	¾"	24" x 24"	Amber Beige, Scandina Gray	✓	✓	275.04	72	2,517.36
 Genoa	Stone	¾"	24" x 24"	Blanco, Crema	✓	✓	275.04	72	2,517.36
 Genoa	Stone	¾"	12" x 24"	Blanco, Crema	✓	✓	303.6	160	2,807
 Glocal	Concrete	¾"	24" x 24"	Clear, Ideal, Type, Classic, Absolute*, Chamois*	✓	✓	232.5	60	2,160
 Glocal	Concrete	¾"	24" x 48"	Clear, Ideal, Type, Classic, Absolute*, Chamois*	✓	✓	271.25	35	2,621
 Glocal <i>(special order - allow 12-14 weeks lead time)</i>	Concrete	¾"	32" x 32"	Clear*, Ideal*, Type*, Classic*, Absolute*, Chamois*	✓	✓	288.96	42	2,750
 Glocal <i>(special order - allow 12-14 weeks lead time)</i>	Concrete	¾"	48" x 48"	Ideal*, Type*, Classic*, Absolute*, Chamois*	✓	✓	310	20	3,009
 Jurupa	Wood	¾"	12" x 48"	Cool, Master, Camp	✓	✓	279	72	2,664
 Jurupa	Wood	¾"	24" x 24"	Cool, Master, Camp	✓	✓	232.5	60	2,160
 Lagoon	Stone	¾"	24" x 48"	Moonbeam, Sandshell, Atmosphere, Sharkskin, Cloudburst	✓	✓	271.25	35	2,621
 Lemmy	Concrete	¾"	32" x 32"	Nimbus, Excalibur, Venom, King	✓	✓	288.96	42	2,750
 Na.Me	Stone	¾"	24" x 24"	Bourgogne, Jura Beige	✓	✓	232.5	60	2,160
 Noon	Wood	¾"	12" x 48"	Daylight, Ember, Honey	✓	✓	279	72	2,664
 Quarziti 2.0	Stone	¾"	24" x 24"	Glacier, Mountains, Waterfall, River, Mantle	✓	✓	232.5	60	2,160
 Quarziti 2.0	Stone	¾"	12" x 24"	Glacier, Mountains, Waterfall, River, Mantle*	✓	✓	232.4	120	2,201

If installing on elevated surface over ¾" all porcelain must have a factory applied fiber mesh backing.

Spacers are required for all porcelain paver installations. For vehicular applications, there must be a mortar install over a concrete slab. Visit Belgard.com/porcelain for additional installation details.

* Special Order

PORCELAIN PAVERS (CONTINUED)

UNITS	APPEARANCE	THICKNESS	SIZE	COLOR OPTIONS	ADA	PEDESTAL APPLICATION	SQ. FT. PER PALLET	PCS. PER PALLET	PALLET WEIGHT (LBS)
									
 Quarziti 2.0 <i>(special order - allow 12-14 weeks lead time)</i>	Stone	¾"	18" x 36"	Glacier*, Mountains*, Waterfall*, River*, Mantle*	✓	✓	234.9	54	2,235
 Quarziti 2.0	Stone	¾"	24" x 48"	Glacier, Mountains, Waterfall, River, Mantle*	✓	✓	271.25	35	2,621
 Silverlake	Stone	¾"	24" x 24"	Braies, Resia, Moritz*, Nemi, Moro*, Orsi	✓	✓	232.5	60	2,160
 Silverlake	Stone	¾"	24" x 48"	Braies, Resia, Moritz*, Nemi, Moro*, Orsi	✓	✓	271.25	35	2,621
 Silverlake <i>(special order - allow 12-14 weeks lead time)</i>	Stone	¾"	32" x 32"	Braies*, Resia*, Moritz*, Nemi*, Moro*, Orsi*	✓	✓	289.33	42	2,751
 Unico	Various	¾"	13" x 24"	Glocal: Ideal, Type, Classic, Clear; Noon: Daylight, Ember, Honey; Quarziti 2.0: Glacier, Mountains, Waterfall, River;	✓		254.82	120	2,080



RESISTANT TO FREEZE THAW

Freeze thaw resistant—100% frost-free and properties remain unaltered at temperatures ranging from -51.1° to + 60° C (-60°F to +140°F).



RESISTANT TO BREAKAGE

Because every slab can withstand loads of over 2200 lbs.



RESISTANT TO CHEMICAL AGGRESSION

Because our pavers are unaffected by alkalis, acids, chemical agents, salt and other de-icing materials.



RESISTANT TO STAINS

Because a high density and ultra-low absorption rate creates a tight paver surface, it fends off surface mold, moss, dirt and other types of stains.



EASY TO LAY

Because of superior accuracy in dimensional sizing and linear sides, the pavers allow for perfectly executed installations with tight and accurate lines.



EASY TO CLEAN

Because it can be cleaned with normal household cleaners and even pressure washed with a **low pressure** washing device.**




EASY TO REMOVE

Because a 24" x 24" slab weighs just 37 lbs., its light weight permits easy removal, serviceability and even reusability. (Excluding adhered installations).



EASY FOR YOU

Because the structured top textures formed on the surface of our pavers create slip resistant surfaces.

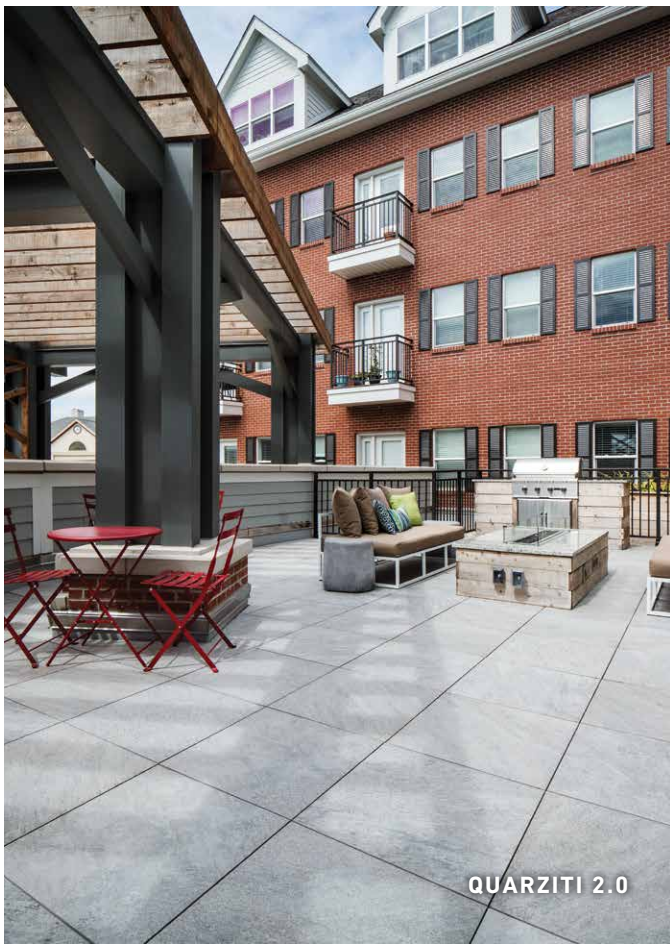

QUARZITI 2.0



NOON



QUARZITI 2.0



NOON AND QUARZITI 2.0



NA.ME








SILVERLAKE


SEGMENTAL RETAINING AND FREESTANDING WALLS (SRW & FSW)

UNITS	UNIT SIZE			CONNECTION TYPE		ACCESSORIES* (SOLD SEPARATELY)		TEXTURE			FACE STYLES		BATTER/ SETBACK	SQ. FT. PER PALLET
	Height	Width	Depth	Block	Other	Cap Unit	Step Unit	Sculpted	Split	Tumbled	Straight	Stone Cut		
 Ashlar Tandem™	7"	13 ³ / ₁₆ " 15 ¹³ / ₁₆ " 18 ⁷ / ₁₆ "	2 ⁵ / ₈ "	Tandem Modular Block	Polypropylene Connectors	✓		✓			✓		Vertical or 4°	70.1
 Celtik® Wall 90mm	3 ³ / ₁₆ "	6 ⁷ / ₈ " 10 ¹ / ₁₆ " 13 ³ / ₁₆ " 17 ¹ / ₈ "	8 ⁷ / ₈ "		Plastic Clips	✓	✓		✓			✓	Vertical or 9°	33
 Celtik® Wall 135mm	5 ⁵ / ₁₆ "	6 ⁷ / ₈ " 10 ¹ / ₁₆ " 13 ³ / ₁₆ " 17 ¹ / ₈ "	8 ⁷ / ₈ "		Plastic Clips	✓	✓		✓			✓	Vertical or 9°	36
 Diamond® 9D	6"	17 ³ / ₄ "	9"	Rear Lip		✓			✓		✓		10.6°; 1.125" Per Course	43.1
 Diamond Pro® PS Straight Face	8"	18"	12"		Fiberglass Pins	✓			✓		✓		1.7° or 7.1°	36
 Easton Stone™	4"	12"	8"								✓		Vertical	42
 Mega Tandem™ 3-in-1 System	12"	3"	24"		41", 22" & 7" Polypropylene Connectors	✓		✓					2.4°	96
 Melville™ Wall	4"	20"	10"								✓		Vertical	26.67
 Melville Tandem™	7"	13 ³ / ₁₆ " 15 ¹³ / ₁₆ " 18 ⁷ / ₁₆ "	2 ⁵ / ₈ "	Tandem Modular Block	Polypropylene Connectors	✓					✓		0 / 4°	70
 Shelton Wall™	6"	6 ¹ / ₄ " 12 ¹ / ₁₀ " 16 ¹ / ₁₄ "	10"		Fiberglass Pins	✓				✓	✓		Near Vertical, 9.5°	26
 Steeple Crest™	6"	6 ¹ / ₄ " 12 ¹ / ₁₀ " 16 ¹ / ₁₄ "	10"		Fiberglass Pins	✓					✓		Near Vertical, 9.5°	26
 Sterling™ Freestanding or Retaining	6"	7 ³ / ₄ "	12"		Fiberglass Pins				✓		✓		Near Vertical, 10.6°	28.35
 Tandem® Modular Block	7 ¹ / ₁₆ "	7 ⁷ / ₈ "	7 ⁷ / ₈ "										N/A	
 Vertica® Planter Unit	8"	18"	16"	Surface Lug					✓				5" Nominal	30
 Weston Stone™ Universal	4"	12"	8"							✓	✓		Vertical	42


COMPLEMENTARY PRODUCTS

PRODUCT	SIZE	PALLET INFORMATION
 Celtik® Wall Cap	3 ⁵ / ₁₆ " x 12" x 16"	50 units per pallet
 Celtik® Wall Step	11" x 16" x 3 ¹ / ₂ " 13" x 16" x 3 ¹ / ₂ "	70 units per pallet (35 of each size)
 Diamond® 9D Cap	3" x 17 ¹ / ₄ " / 10 ³ / ₈ " x 9"	126 units per pallet
 Diamond Pro® PS Cap	3" x 8" x 13"	126 units per pallet
 Shelton Wall™ Cap	3" x 14" / 8" x 12"	72 units per pallet
 Steeple Crest™ Cap	3" x 12" / 8" x 12"	72 units per pallet
 Tandem Cap	15" x 24" x 3 ¹ / ₄ "	32 units per pallet
 U Start Base Block	3 ¹ / ₂ " x 18 ¹ / ₂ " x 12"	56 units per pallet

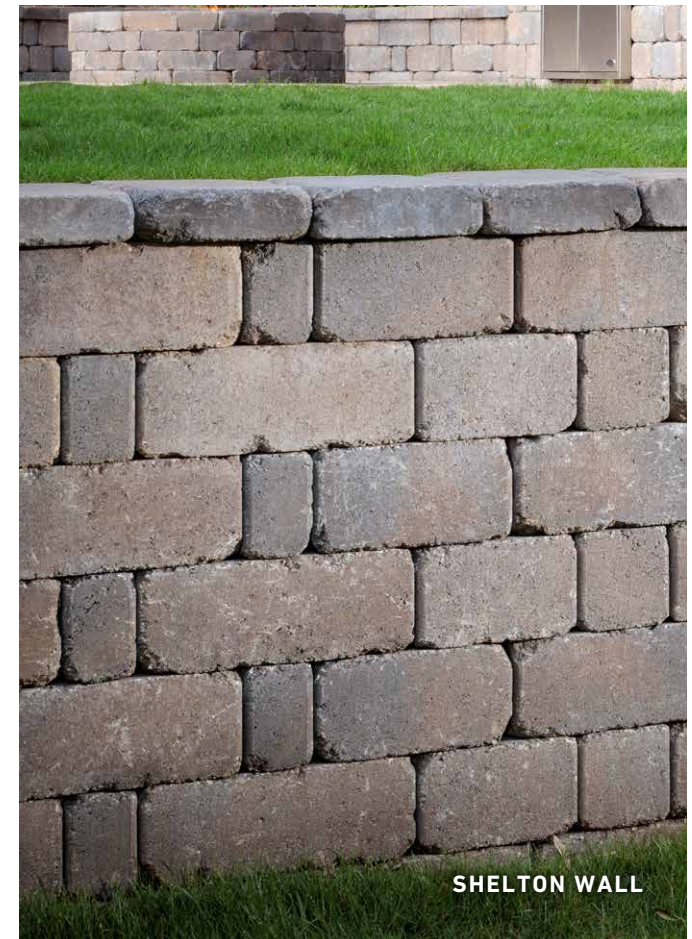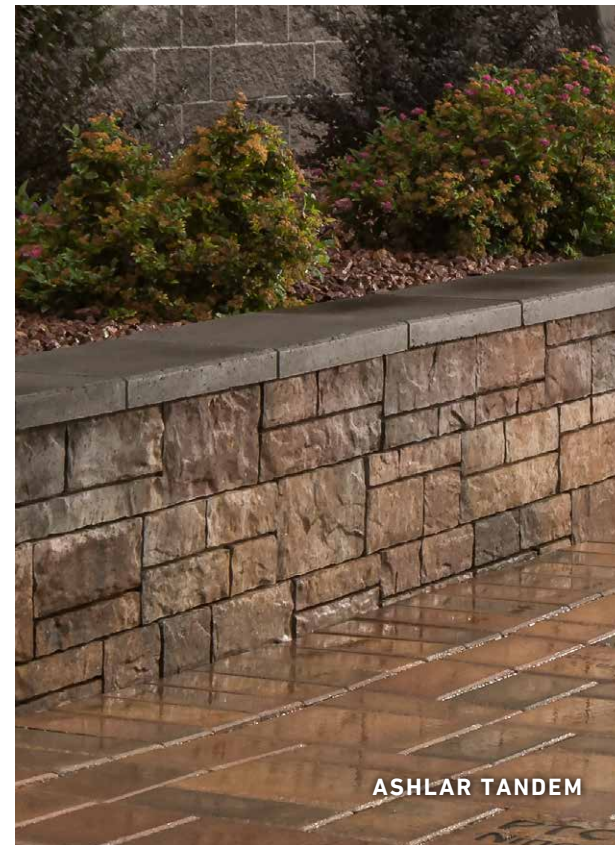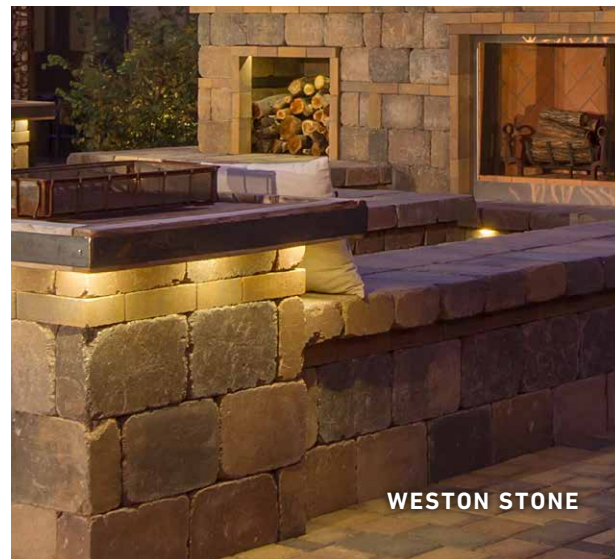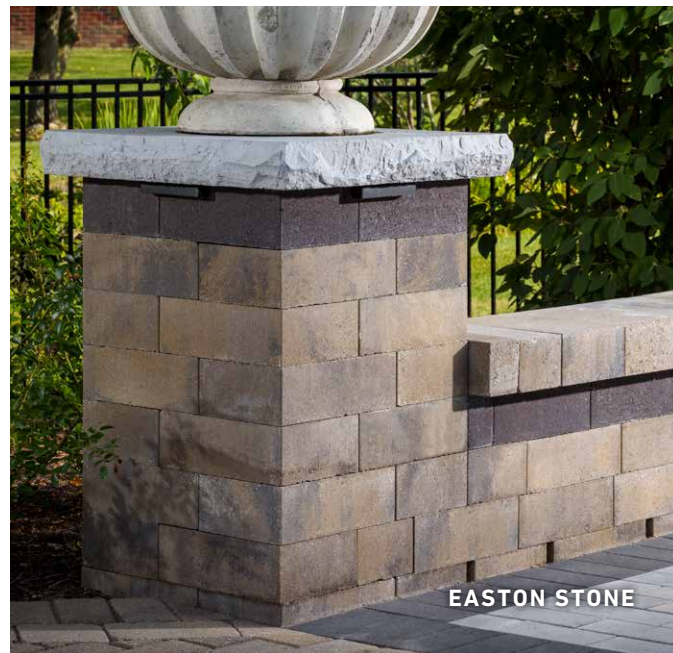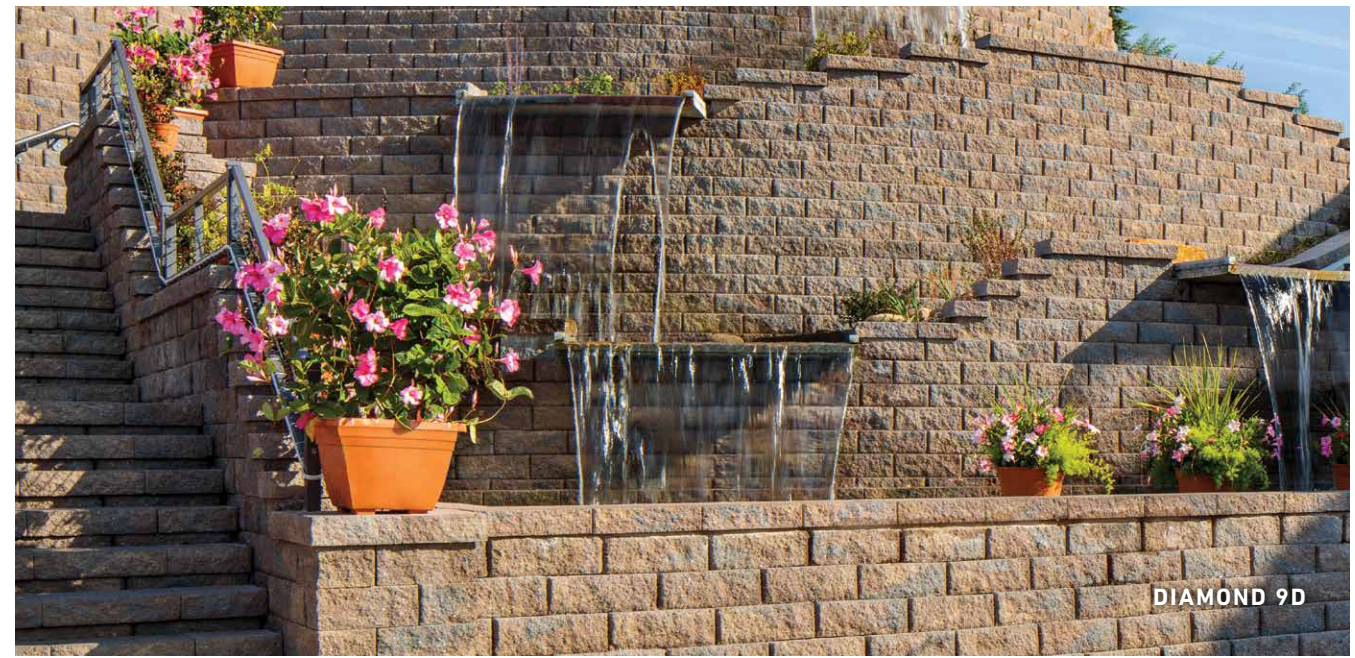


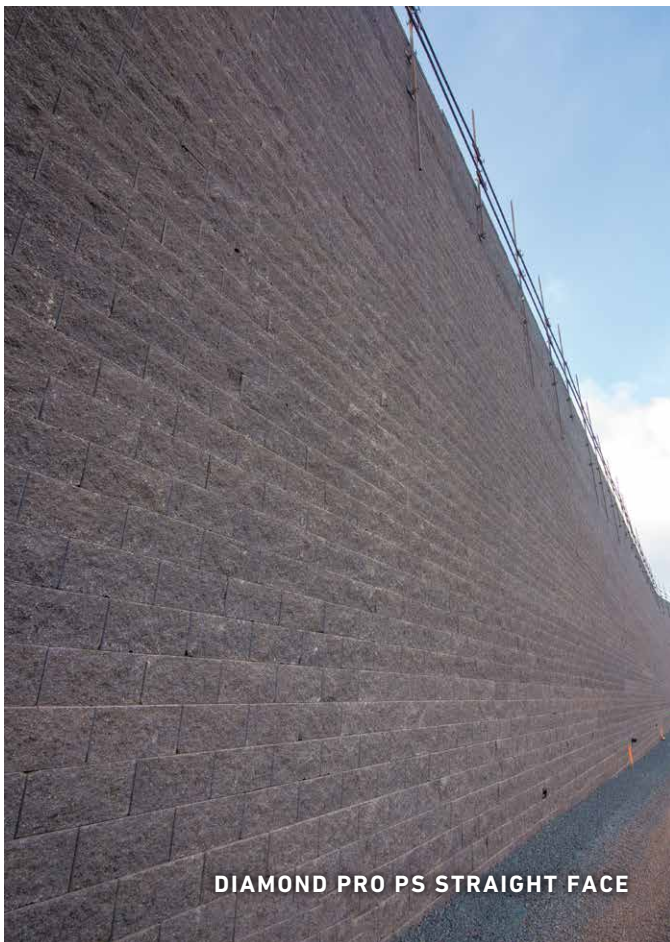

DIAMOND PRO PS STRAIGHT FACE

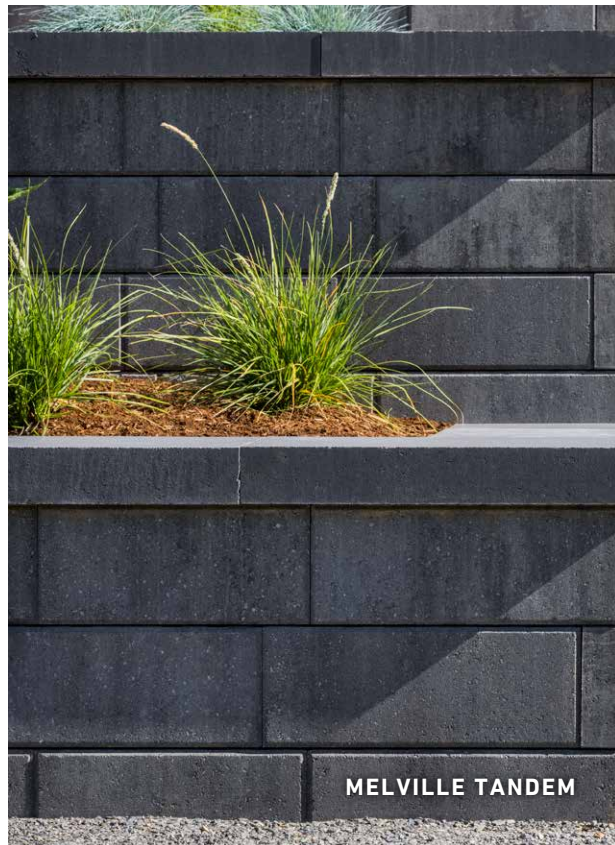

MELVILLE TANDEM

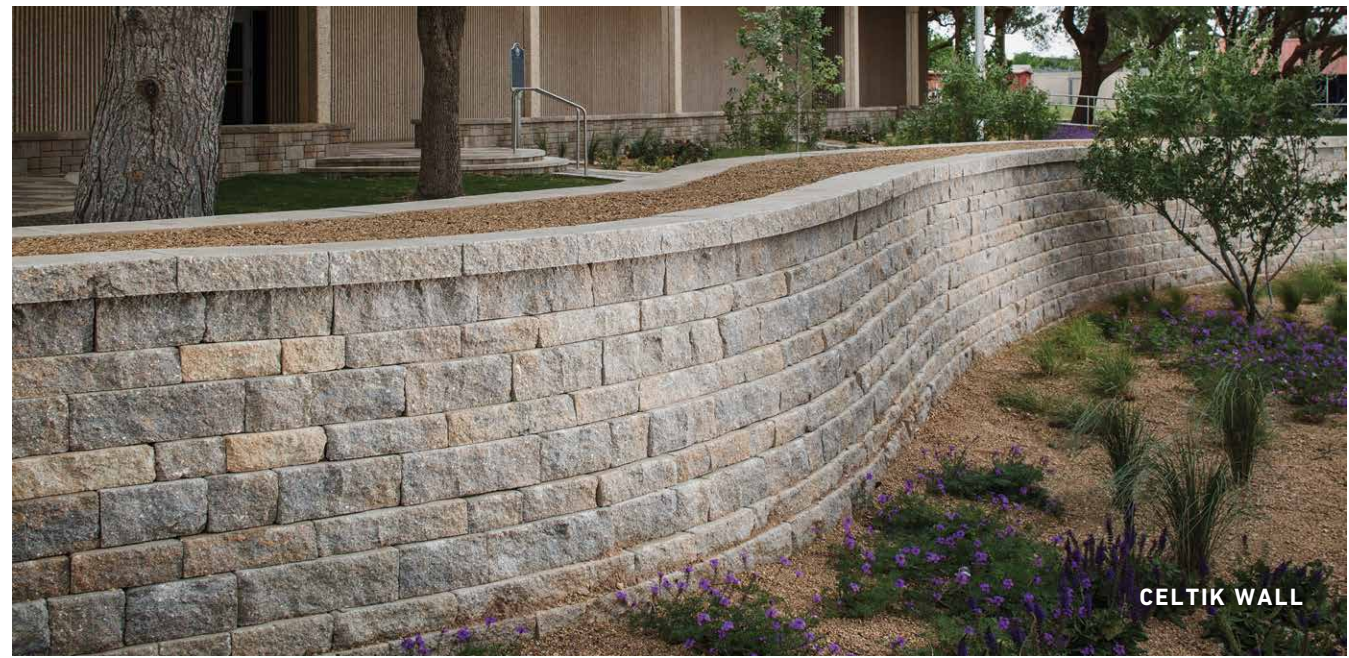


CELTIK WALL



MELVILLE WALL



STERLING

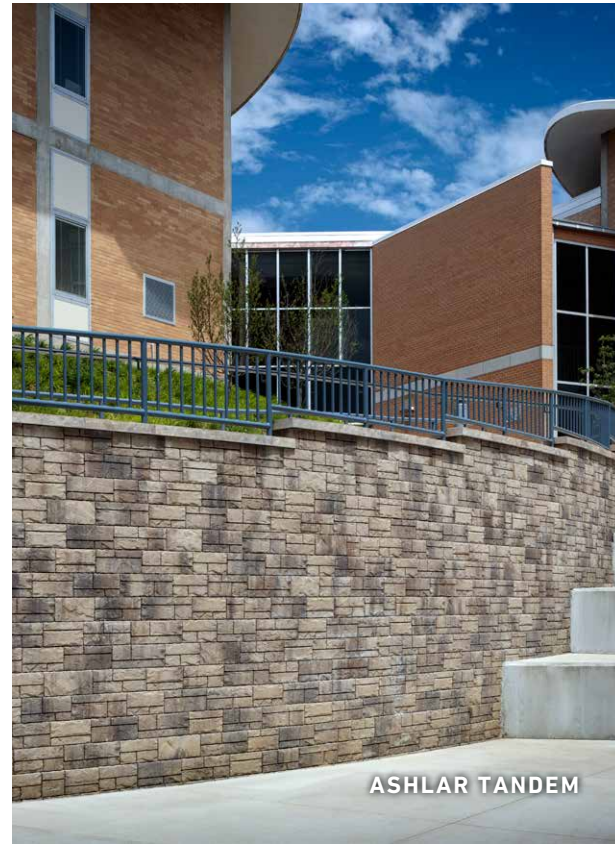

ASHLAR TANDEM



MEGA TANDEM

ROOFTOP PAVERS & PEDESTALS

Possibilities are endless when designing and building plaza decks using Belgard Commercial Pedestals. The pedestal system's elevation range of 1/8" - 36" allows for building plaza decks over almost any sloping or difficult surface.

Building plaza decks over occupied space has never been easier. The unique screw-to-adjust feature eliminates tedious and time-consuming installation often associated with constructing level decks over sloping surfaces. Construction crews quickly level each plaza paver by adjusting pedestal height, even while loaded.

Future access to waterproofing entails simply removing specific plaza pavers. Pedestal adjustments within the allowed range are accomplished by merely adjusting pedestal height and you're done – saving time and money.

SPECIFICATIONS

- Supports up to 1000 lbs.
- Maximum elevation up to 36" using couplers and braces
- Impervious to water, mold & freeze-thaw
- Preassembled
- Packaged in weather-resistant boxes
- Contains 20% post-industrial recycled material
- Engagement "bumps" warn of over-extension

RESOURCES AVAILABLE

- CAD details
- Specifications
- Technical cut sheets
- Maintenance guide
- Videos: planning, installation & more
- Take-off assistance
- Samples available
- Technical assistance
- Customer service



- Model PR1**
Adjusts from 1.2" - 2.55"
- Model PR2**
Adjusts to 6.1"
- Model PR3**
Adjusts to 16"

	MODEL SE SUPPORTS	MODEL NM SUPPORTS	PEDESTAL PRIME SUPPORTS
Self Leveling Head	✓		✓
Fixed Head	✓	✓	✓
Adjustable	✓	✓	✓
Extendable w/ Coupler	✓	✓	✓
Adjustment Key	✓	✓	✓
Locking IPE Pins	✓	✓	✓
Recycleable (LEED)	✓	✓	✓
Loading Capacity	✓	✓	✓
Integrated Extension Coupler			✓

ROOFTOP PLAZA SLABS


UNITS	PAVER THICKNESS	PAVER SIZE	APPLICATIONS		ADA	SQ. FT. PER PALLET	PALLET WEIGHT (LBS)
				ROOFTOPS & PLAZAS			
Saturna 12 x 24	50 mm	12" x 24"	✓	✓	✓	135	2,900
Saturna 24 x 24	50 mm	24" x 24"	✓	✓	✓	96	2,300
Saturna 18 x 18	40mm	18" x 18"	✓	✓	✓	100	2,400
Texada 12 x 24	50 mm	12" x 24"	✓	✓	✓	135	2,900
Texada 24 x 24	50 mm	24" x 24"	✓	✓	✓	96	2,300
Saturna 24 x 24	50 mm	24" x 24"	✓	✓	✓	96	2,300
Saturna 18 x 18	40 mm	18" x 18"	✓	✓	✓	100	2,400
Western Plaza Slab	1 13/16"	24" x 24"	✓	✓	✓	96	2,208
Ipe Wood Plaza Slab	1.69"	24" x 24"	✓	✓	✓	176	990.88
Ipe Wood Plaza Slab	1.69"	24" x 48"	✓	✓	✓	176	990.88
Cumaru Wood Plaza Slab	1.69"	24" x 24"	✓	✓	✓	176	990.88
Cumaru Wood Plaza Slab	1.69"	24" x 48"	✓	✓	✓	176	990.88

CUBES (PLANTERS/BENCHES) & CUBE TOPS

PRODUCT NAME	COMMON SIZES (CUSTOM SIZES AVAILABLE)	COLORS (CUSTOM COLORS AVAILABLE)	MINIMUM QTY
Powder Coated Aluminum Cube	24"L x 24"H x 20"H 24"L x 24"H x 36"H 48"L x 24"H x 20"H 48"L x 24"H x 36"H	Red, Black, White, Charcoal, Silver, Bronze, Zinc*	1
Ipe Cube	24"L x 24"H x 16.5"H 48"L x 24"H x 16.5"H	Brown (Natural variations to be expected)	1
Ipe Top	24"L x 24" H 48"L x 24"H	Brown (Natural variations to be expected)	1

PEDESTALS & ACCESSORIES


PRODUCT NAME	PRODUCT DESCRIPTION	PIECES PER CARTON
STAR-T	3/8" - 9/16" (10-15mm)	50
STAR-B	3/16" Extension (5mm)	50
SE0-P	1.125" - 1.5" (28-38mm)	40
SE1-P	1.5" - 2" (37.5-50mm)	30
SE2-P	2" - 3" (50-75mm)	25
SE3-P	3" - 4.75" (75-120mm)	25
SE4-P	4.75" - 6.75" (120-170mm)	25
SE5-P	6.75" - 8.75" (170-215mm)	25
NM-1	1" - 1.57" (25-40mm)	40
NM-2	1.57" - 2.75" (40-70mm)	30
NM-3	2.36" - 3.93" (60-100mm)	25
NM-4	3.54" - 6.30" (90-160mm)	15
NM-5	5.90" - 10.63" (150-270mm)	12
NM-EXT	5.7" Extension (145mm)	30
EH-12	1/2" Fixed (12mm)	250
EH-15	5/8" Fixed (16mm)	200
EH-20	3/4" Fixed (20mm)	150
RUB-14	1/4" Fixed RUBBER	150
RUB-38	3/8" Fixed RUBBER	150
RUB-PINS	1/4" Fixed w/ 4 Pins	100
PR1	1.2" - 2.55" Adjustable Pedestal	1 per box
PR2	6.1" Adjustable Pedestal	1 per box
PR3	16" Adjustable Pedestal	1 per box

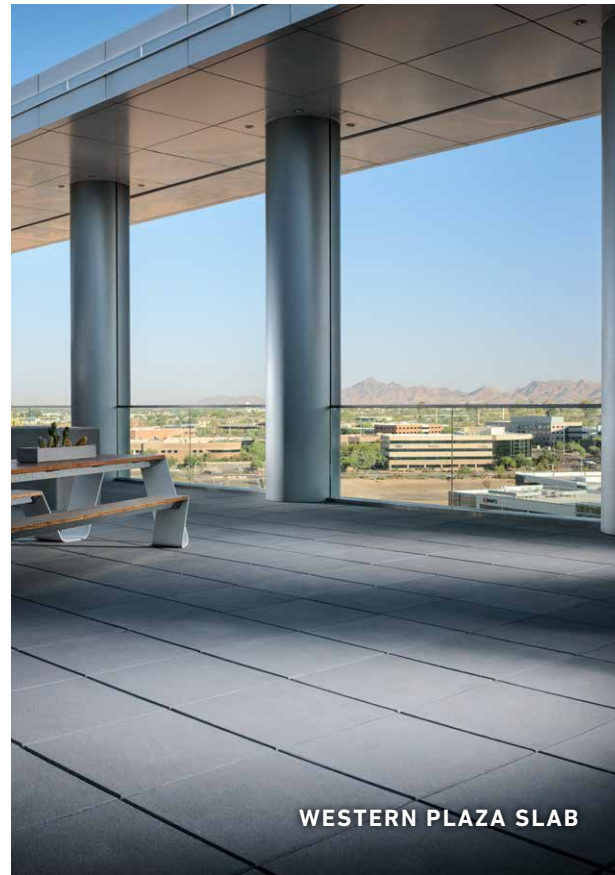

WESTERN PLAZA SLAB



WOOD PLAZA PAVERS

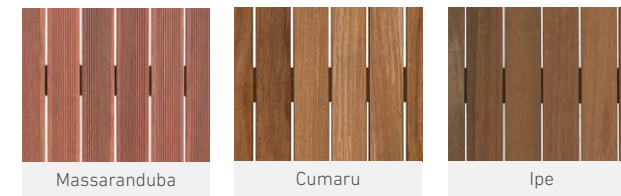



SATURNA



TEXADA



CUBE COLORS

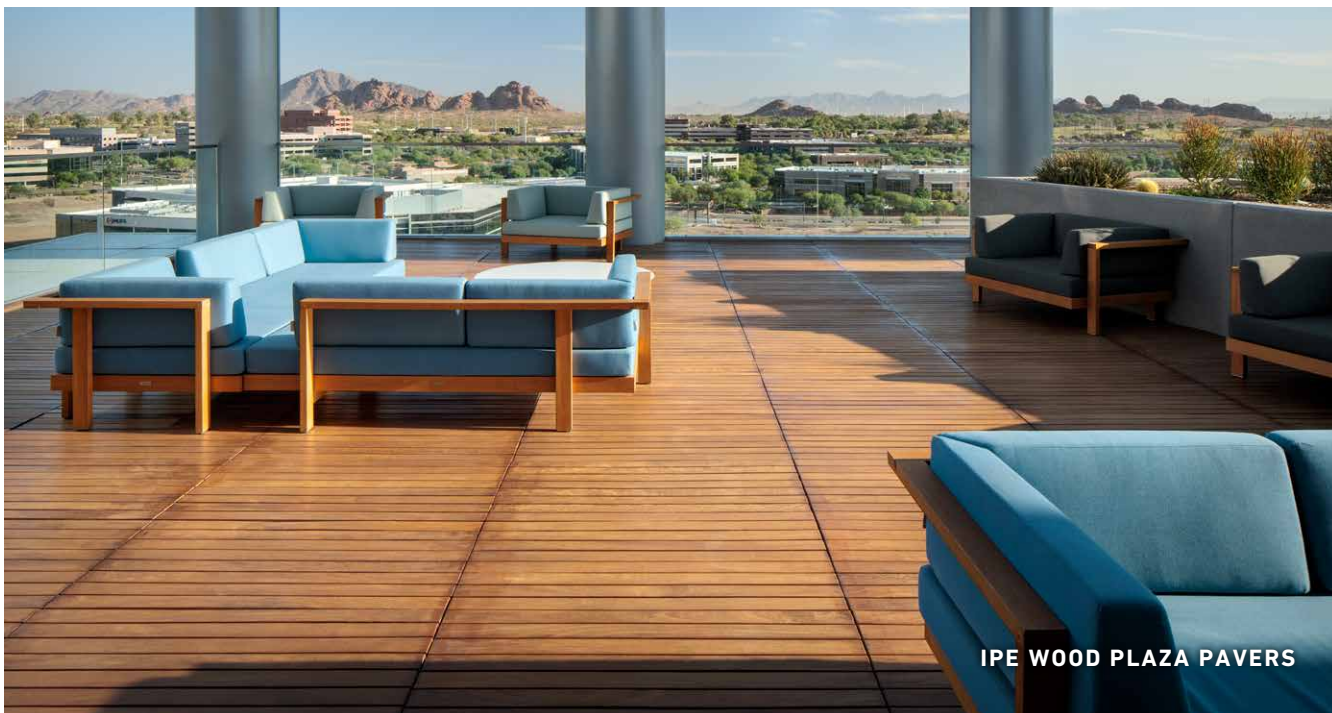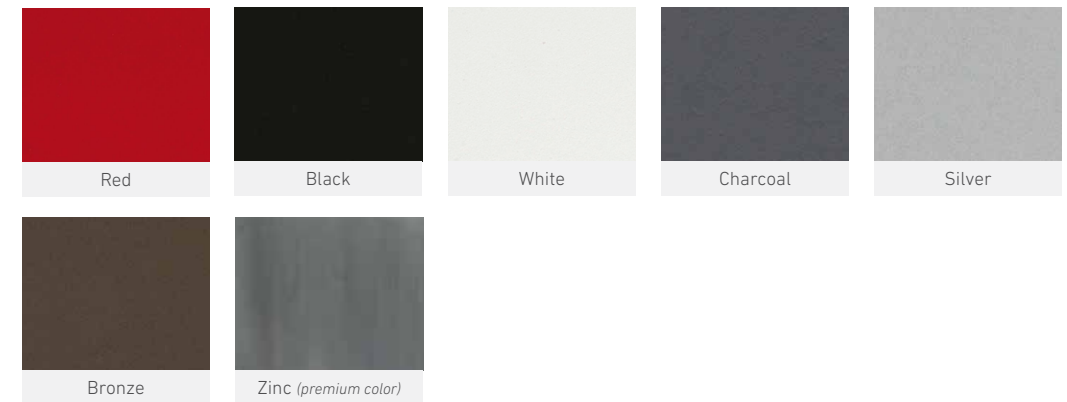



NOON PORCELAIN PAVERS

PROFESSIONAL SUPPORT



ENVIRONMENTAL SOLUTIONS

Belgard consultants can work with your team to develop the best PICP system design or retaining wall configuration to control runoff volume and discharge rates, improve the quality of local groundwater, reduce or prevent downstream impacts, and minimize the land consumed for stormwater management.



CAD FILES

For your convenience, Belgard offers a constantly expanding library of easy-to-download CAD files of our products and patterns.



CONTINUING EDUCATION

Belgard offers a variety of ongoing educational programs for our industry partners, including Lunch & Learns, online CEU courses, and our Belgard University training program.



SITE PLANNING

The experts at Belgard can help you optimize your site in a number of ways—whether you're looking for creative ways to define public spaces, manage or harvest stormwater, or increase the useable space for development.



ENGINEERING SERVICES

Our team of design consultants can help address both aesthetic and engineering design concerns, material quantity estimates and permit ready plans.

SUPERLITE LOCATION



Superlite Solution Center
1919 W Fairmont Dr Ste 5
Tempe, AZ 85282
Ph: 800-366-7877



[BELGARDCOMMERCIAL.COM](https://www.belgardcommercial.com)