OFFRING.

NEW ENGLAND CONNECTICUT, MAINE, MASSACHUSETTS, NEW HAMPSHIR RHODE ISLAND, UPSTATE NEW YORK & VERMONT



UPSTATE NEW YORK | CT, MA, ME, NH, NY, RI & VT 1

PAVER APPLICATIONS





Pedestrian

Designated for areas that are primarily for pedestrian applications, including commercial plazas that may require occasional access for emergency or maintenance vehicles, as well as residential driveways.

Designated for commercial vehicular areas, access ways, and parking lots where only cars and light trucks are anticipated. Heavy vehicles should have limited access and use.

Light Vehicles

PAVER COLORS & FINISHES

Colors







DANVILLE BLEND

MIDNIGHT





SILEX

Finishes

Manufacturing processes generate various finishes that are distinctive and can create the exact look you desire for your project. All processes are not available in all locations. Check with your local Belgard Sales Representative for more information.



😽 DuraFusion"

Standard (smooth) Unit surfaces and micro-chamfers are carefully molded using a highquality precision machined steel shoe assembly which creates units with an extremely smooth surface and precision detailed chamfer.



Units are molded to form a surface that emulates natural stone with a sculpted, textured finish.

DuraFusion fuses a top layer of rich pigments with Belgard's core color process. The result is a paver with a richness and purity of color that's sleek and vibrant.

😽 DuraFusion™ + ColorTech™

DuraFusion[™] + ColorTech[™] multiplies the enhancement of DuraFusion[™] with the protection of ColorTech[™] to offer the highest quality concrete paver available today. The result is a smooth, gentle finish and vibrant color blend with unmatched protection against fading, stains and scratches.



Occasional Heavy Vehicles

Designated for vehicular areas, parking lots, and roadways where limited heavy vehicles are anticipated daily, such as large delivery trucks or garbage trucks.



Frequent Heavy Vehicles

Designated for vehicular areas, parking lots, and roadways where heavy vehicles are a regular component of the daily traffic volume.

Paver application icons are general recommendations. Site conditions and pavement cross section must be considered. Paver application icons are based on placement over unbound aggregates for setting beds, base and subbase.

NITS	Holland	Stone	60 mm 80 mm	SIZE	Ŕ	E							FINISHES		CHAM			
		Stone							E		Standar	i Du	IraFusion	DuraFusion + ColorTech	WID	TH	SQ. FT. PER PALLET	
	London			4" x 8"	60 mm	80 mm	80 mm	80 mm	\checkmark		\checkmark				7 m	m	120 (60 mr 96 (80 mm	
		Cobble	60 mm	6" x 6"	60 mm				\checkmark		\checkmark				3 m	m	120	
	London	Cobble	60 mm	6" x 9"	60 mm				\checkmark		\checkmark				3 m	m	112.5	
PERMEAB	BLE PAVEI	RS																
					APPLICATIONS			ADA*	MECHANICAL INSTALL		FINISHES		MANUF.	%	CHAMFER	ER SQ. FT.		
JNITS TH	THICKNESS	SIZE	Ŕ			.		Ŀ	5	Standard [JuraFusion	DuraFusion + ColorTech	JOINT WIDTH	SURFACE OPENING	WIDTH	R PER PALLET		
QUALINE [™] SERIE	ES																	
	3" x 12"	80 mm	3" x 12"	80 mn	n 80 m	m			\checkmark		\checkmark			7 mm	10%	3 mm	88	
	4.5" x 9"	80 mm	4½" x 9"	80 mn	n 80 m	m	80 mm	80 mm	\checkmark		\checkmark			10 mm	10%	3 mm	90	
	6" x 6"	80 mm	6" x 6"	80 mn	n 80 m	m	80 mm		\checkmark		\checkmark			7 mm	7%	3 mm	90	
	6" x 12"	80 mm	6" x 12"	80 mn	n 80 m	m			\checkmark		\checkmark			7 mm	5%	3 mm	90	
Ser 1	Aqualine Ashlar™	80 mm	4½" x 4½" 4½" x 9" 9" x 9"	80 mn	n 80 m	m	80 mm	80 mm	\checkmark	\checkmark	\checkmark			10 mm	12%	3 mm	88	
ONCRET	E GRID P	AVEMENTS	5															
UNITS						APPLICATIONS			ADA MECHAN INSTA		CAL		FINISHES		% 511	RFACE	SQ. FT.	
		THICKNESS	SIZE	Ŕ			-B		F		Stan	dard	DuraFusion	DuraFusion ColorTech	+ OPE		PER PALL	

NOTE: Color selection for above may vary slightly across all paver lines. Contact your Belgard Representative for exact color selections. Turfstone available in natural gray only.

* May be Suitable for ADA applications. Always evaluate site-specific uses to ensure surface suitability. Product installation and surface maintenance influence compliance with ADA Standards for Accessible Design Section 302 Floors or Ground Surfaces. Tumbling or antiquing pavers can also create surface or edges that may make the product unsuitable for ADA applications. Interlocking pavers can be used for a variety of different vehicular applications. Appropriate shape and thickness is based on project-specific conditions including type of loading, base design, and subgrade conditions. It is recommended that you consult a Belgard representative in your area before specifying products for vehicular applications.





<











PORCELA	IN PAVERS									
						ADA	PEDESTAL	SQ. FT. PER	PCS. PER	PALLET
UNITS	UNITS		THICKNESS	SIZE	COLOR OPTIONS	E.	APPLICATION	PALLET	PALLET	WEIGHT (LBS)
Contact Belgard S	ales Representative for separate catal	og displaying full color	/product offering on s	special order basis						
	Glocal - 24 x 24	Concrete	3/4"	24" x 24"	Clear, Ideal, Classic	\checkmark	\checkmark	232.5	60	2,160
	Glocal - 24 x 48	Concrete	3⁄4"	24" x 48"	Clear, Ideal, Classic	\checkmark	\checkmark	271.25	35	2,621
	Lagoon	Stone	3/4"	24" x 48"	Moonbeam, Sandshell, Sharkskin	\checkmark	\checkmark	271.25	35	2,621
	Noon - 8 x 48	Wood	3/4"	8" x 48"	Daylight, Ember, Honey	\checkmark	Only with Mirage eDeck system	151.8	60	1,415
	Noon - 12 x 48 (special order)	Wood	3⁄4"	12" x 48"	Daylight, Ember, Honey	\checkmark	\checkmark	279	72	2,664
	Quarziti 2.0 - 18 x 36 (special order)	Stone	3⁄4"	18" x 36"	Glacier, Mountains, River, Waterfall	\checkmark	\checkmark	234.9	54	2,235
	Quarziti 2.0 - 24 x 48	Stone	3⁄4"	24" x 48"	Glacier, Waterfall Special Order: River, Mountains	\checkmark	\checkmark	271.25	35	2,621
	Quarziti 2.0 - 24 x 24	Stone	3⁄4"	24" x 24"	Glacier, Mountains, River, Waterfall	\checkmark	\checkmark	232.5	60	2,160
	Verona	Stone	3/4"	24" x 24"	Blue Stone, Platinum, Yukon Special Order: Taos	\checkmark	\checkmark	232.5	60	2,160
	Unico	Stone	3⁄4"	13" x 24"	African Stone, Blue Stone, Glacier, Mountains, River, Waterfall, Daylight, Ember, Honey, Clear, Ideal, Classic			254.82	120	2,080



RESISTANT TO FREEZE THAW

Freeze thaw resistant—100% frost-free and properties remain unaltered at temperatures ranging from -51.1° to + 60° C (-60°F to +140°F).



2200 ІЬ

RESISTANT TO

Because every slab

of over 2200 lbs.

can withstand loads

BREAKAGE

RESISTANT TO CHEMICAL Aggression

Because our pavers are unaffected by alkalis, acids, chemical agents, salt and other de-icing materials.

* It is important that all pressure washing of your porcelain pavers be done with a low pressure washer with a maximum of 1600 psi and nothing more powerful. When pressure washing your installation, care should be taken to prevent damage to the grout (adhesive and

grout installations) and some re-sanding will be necessary when power washing an installation with sand or polymeric sand joints.

RESISTANT TO STAINS

Because a high density and ultra-low absorption rate creates a tight paver surface, it fends off surface mold, moss, dirt and other types of stains.



EASY TO LAY

Because of superior accuracy in dimensional sizing and linear sides, the pavers allow for perfectly executed installations with tight and accurate lines.



EASY TO CLEAN

Because it can be cleaned with normal household cleaners and even pressure washed with a **low pressure** washing device.*



EASY FOR YOU

Because a 24" x 24" slab weighs just 37 lbs., its e light weight permits easy removal, serviceability and even reusability. (Excluding adhered installations).



Because the structured top textures formed on the surface of our pavers create non-slip surfaces.

ROOFTOP PAVERS & PEDESTALS

Model SE0

Adjusts from 11/4"- 11/2"





Model SE3

Adjusts from 3"- 43/4"



Model SE4

Adjusts from 43/4" - 63/4"

Possibilities are endless when designing and building plaza decks using Belgard Commercial Pedestals. The pedestal system's elevation range of 1/8" - 36" allows for building plaza decks over almost any sloping or difficult surface.

Building plaza decks over occupied space has never been easier. The unique screw-to-adjust feature eliminates tedious and time-consuming installation often associated with constructing level decks over sloping surfaces. Construction crews quickly level each plaza paver by adjusting pedestal height, even while loaded.

Future access to waterproofing entails simply removing specific plaza pavers. Pedestal adjustments within the allowed range are accomplished by merely adjusting pedestal height and you're done – saving time and money.

SPECIFICATIONS

- Supports up to 1000 lbs.
- Maximum elevation up to 36" using couplers and braces
- Impervious to water, mold & freeze-thaw
- Preassembled
- Packaged in weather-resistant boxes
- Contains 20% post-industrial recycled material
- Engagement "bumps" warn of over-extension

RESOURCES AVAILABLE

- CAD details
- Specifications
- Technical cut sheets
- Maintenance guide
- Videos: planning, installation & more
- Take-off assistance
- Samples available
- Technical assistance
- Customer service





Model SE1

Adjusts from 11/2"- 2"



Model SE2

Adjusts from 2"- 3"





Model NM1 Adjusts from 1"- 11/2"

Model NM2 Adjusts from 11/2"- 23/4"

Model NM3 Adjusts from 21/3"- 4"

Model NM4 Model NM5 Adjusts from 31/2"- 61/3" Adjusts from 6" - 101/2"



Adjusts from 1.2"- 2.55"

	MODEL SE SUPPORTS	MODEL NM SUPPORTS	PEDESTAL PRIME SUPPORTS
Self Leveling Head	\checkmark		\checkmark
Fixed Head	\checkmark	\checkmark	\checkmark
Adjustable	\checkmark	\checkmark	\checkmark
Extendable w/ Coupler	\checkmark	\checkmark	\checkmark
Adjustment Key	\checkmark	\checkmark	\checkmark
Locking IPE Pins	\checkmark	\checkmark	\checkmark
Recycleable (LEED)	\checkmark	\checkmark	\checkmark
Loading Capacity	\checkmark	\checkmark	\checkmark
Integrated Extension Coupler			\checkmark

ROOFTOP PAVERS & ACCESSORIES														
					FINISHES	_	PEDESTAL	SQ. FT. PER	PCS. PER	WEIGHT				
UNITS	THICKNESS	SIZE	MATERIAL	Smooth	Shot Blast	Diamond	APPLICATION	PALLET	PALLET	PER SQ. FT. (LBS)				
ROOFTOP PAVERS & SLABS														
Concrete Plaza Slab	2"	24" x 24"	Concrete	\checkmark	\checkmark	\checkmark	\checkmark	84.4	22	24				
Porcelain Plaza Paver	3/4"	See page 14	Porcelain	\checkmark			\checkmark	-	-	-				
Wood Plaza Paver	1.5"	24" x 24" 24" x 48"	Ipe Wood	\checkmark			\checkmark	-	-	5.56				
ACCESSORIES														
Cubes & Cube Tops (Made to order, custom sizes available)	-	24" x 24" x 16½" 48" x 24" x 16½"	lpe Wood or Powder Coated Aluminum	\checkmark			\checkmark	-	-	-				
Pedestals - Fixed Height	-	1⁄4", 1⁄2", 3⁄4" height	-				\checkmark	-	100 pcs per box	-				
Pedestals - Adjustable	-	11⁄4" – 36" height [*]	-				\checkmark	-	30 pcs per box	-				

Plaza Slab Colors - Shot Blast





Cinnamon






Plaza Slab Colors - Matte



Cinnamon





Red

Ginger



SRI White**




Chamois

Chamois




* Higher heights require extension couplers. Additionally, heights over 24" require bracing.

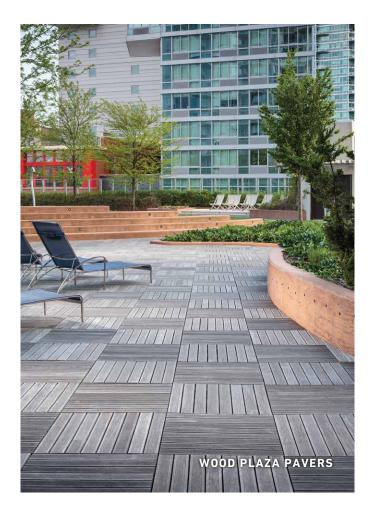






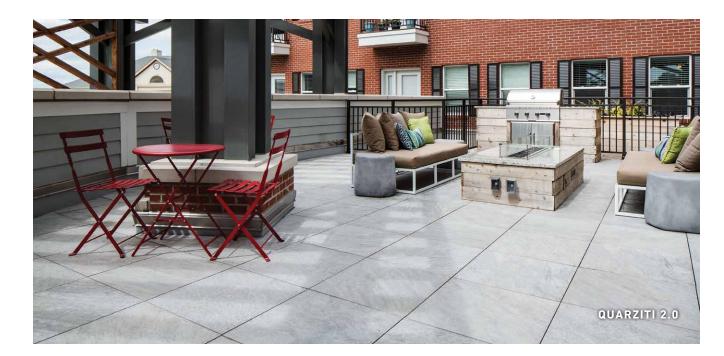



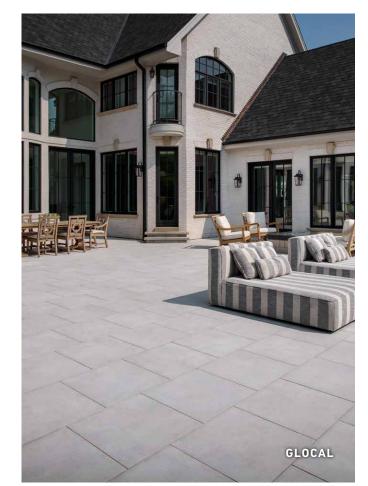

SEGM	SEGMENTAL RETAINING WALLS (SRW)																
		UNIT SIZE			CONNECTION TYPE		ACCESSORIES* (SOLD SEPARATELY)		TEXTURE			FACE STYLES				SQ. FT. PER	PCS. PER
UNITS	Height	Width	Depth	Block	Other	Column/ Corner Unit	Cap	Sculpted	Split	Tumbled	Straight	Victorian	Quarried***	BATTER	PALLET	PALLET	
	AB [®] Classic	8"	18"	12"	Front Lip		\checkmark	\checkmark		\checkmark		\checkmark			6°	40	40
	AB° Stone	8"	18"	12"	Front Lip		\checkmark	\checkmark		\checkmark		\checkmark			12°	40	40
Ŵ	AB° Jumbo Jr.	8"	9"	91⁄2"	Front Lip		\checkmark	\checkmark		\checkmark		\checkmark			6°	40	80
	Diamond Pro°	8"	18"	12"	Rear Lip		\checkmark	\checkmark		\checkmark		\checkmark			7.1°	48	48
	Diamond Pro [*] PS	8"	18"	12"		Fiberglass Pin	\checkmark	\checkmark	\checkmark	\checkmark		\checkmark	\checkmark	\checkmark	1.7° or 7.1°	48	48

ARCHITECTURAL SINGLE & DOUBLE SIDED WALLS															
	UNIT SIZE		CONNECTION TYPE	ACCESS (SOLD SEP		TEXTURE				FACE STYLES		BATTER/	SQ. FT. PER	PCS. PER	
UNITS	Height	Width	Depth	Block	Column/ Corner Unit	Cap	Sculpted	Split	Tumbled	Straight	Victorian	Quarried***	SETBACK	PALLET	PALLET
Cast Stone Wall Single Sided	6"	16"	12"		\checkmark	\checkmark	\checkmark						Vertical	40	60
Cast Stone Wall Double Sided	6"	6" 10" 16"	7"		\checkmark	\checkmark	\checkmark						Vertical	30	27 27 24

* Sold separately: all walls have available cap options. Contact your representative for more information.

** 96 SF panels = 48 square facing feet of SRW

SEGMENTAL RETAINING WALL AVAILABLE COLORS

AB Classic





Danville Blend

AB Jumbo Jr.





Danville Blend

Cast Stone Wall - Cut Stone



Adirondack



Granite Gray

Cast Stone Wall - Ledgestone



18 COMMERCIAL PRODUCT OFFERING

Sable Blend

Sable Blend

Diamond Pro PS Quarried Face



Danville Blend

Sable Blend

Granite Gray


Diamond Pro PS Victorian Face





Danville Blend

Sable Blend

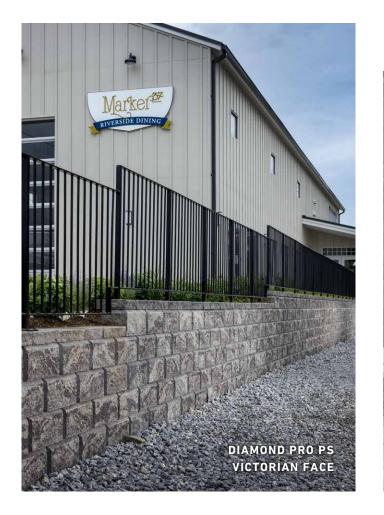











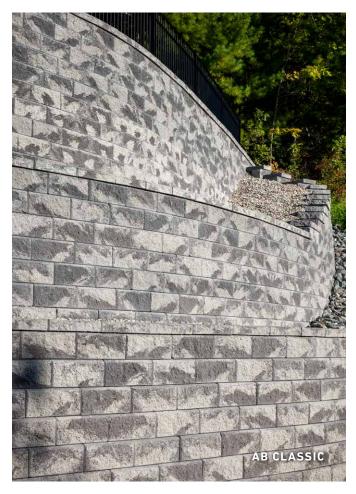

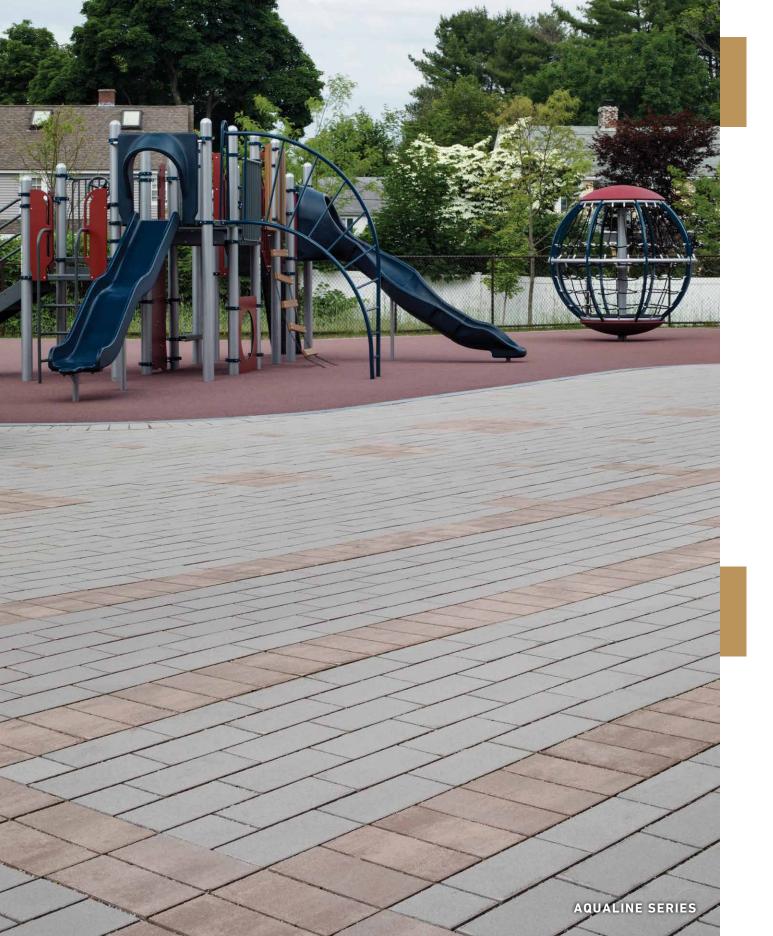

PROFESSIONAL SUPPORT

ENVIRONMENTAL SOLUTIONS

Belgard consultants can work with your team to develop the best PICP system design or retaining wall configuration to control runoff volume and discharge rates, improve the quality of local groundwater, reduce or prevent downstream impacts, and minimize the land consumed for stormwater management.

SITE PLANNING

The experts at Belgard can help you optimize your site in a number of ways—whether you're looking for creative ways to define public spaces, manage or harvest stormwater, or increase the useable space for development.

ENGINEERING SERVICES

Our team of design consultants can help address both aesthetic and engineering design concerns, material quantity

estimates and permit ready plans.



CAD FILES

For your convenience, Belgard offers a constantly expanding library of easy-to-download CAD files of our products and patterns.



CONTINUING EDUCATION

Belgard offers a variety of ongoing educational programs for our industry partners, including Lunch & Learns.



BELGARDCOMMERCIAL.COM

OLDCASTLE APG NEW ENGLAND CONTACTS



SALES REPRESENTATIVES

Chip George Belgard Commercial Development Ph: 603-340-4337

Matt Bush Belgard Commercial Development Ph: 339-837-1352

LOCATIONS

41 Almeida Rd. Rehoboth, MA 02769 **Ph: 774-901-3270**

36 Budlong Road Cranston, RI 02920 **Ph: 401-942-4800**



BELGARDCOMMERCIAL.COM

©2023 Oldcastle APG, Inc. All Rights Reserved. BELCOMM22-D-42274